

Lower Power Operation with the Fusion Device

Introduction

Flash-based Fusion devices exhibit power characteristics similar to an ASIC, making them an ideal choice for power-sensitive applications. With Fusion devices, there is no power-on current surge and no high current transition, both of which occur on many FPGAs. Fusion devices also have low dynamic power consumption and support both low power sleep mode and very low power standby mode, offering further power savings.

Multiple Operation Modes

In Actel Fusion devices, the user can implement the different operation modes (Active Normal Mode, Active Low Frequency Mode, Sleep Mode, and Standby Mode) by configuring and controlling the following major functional blocks: FPGA fabric, Real-Time Counter (RTC), Voltage Regulator (VR), and No Glitch MUX (NGMUX).

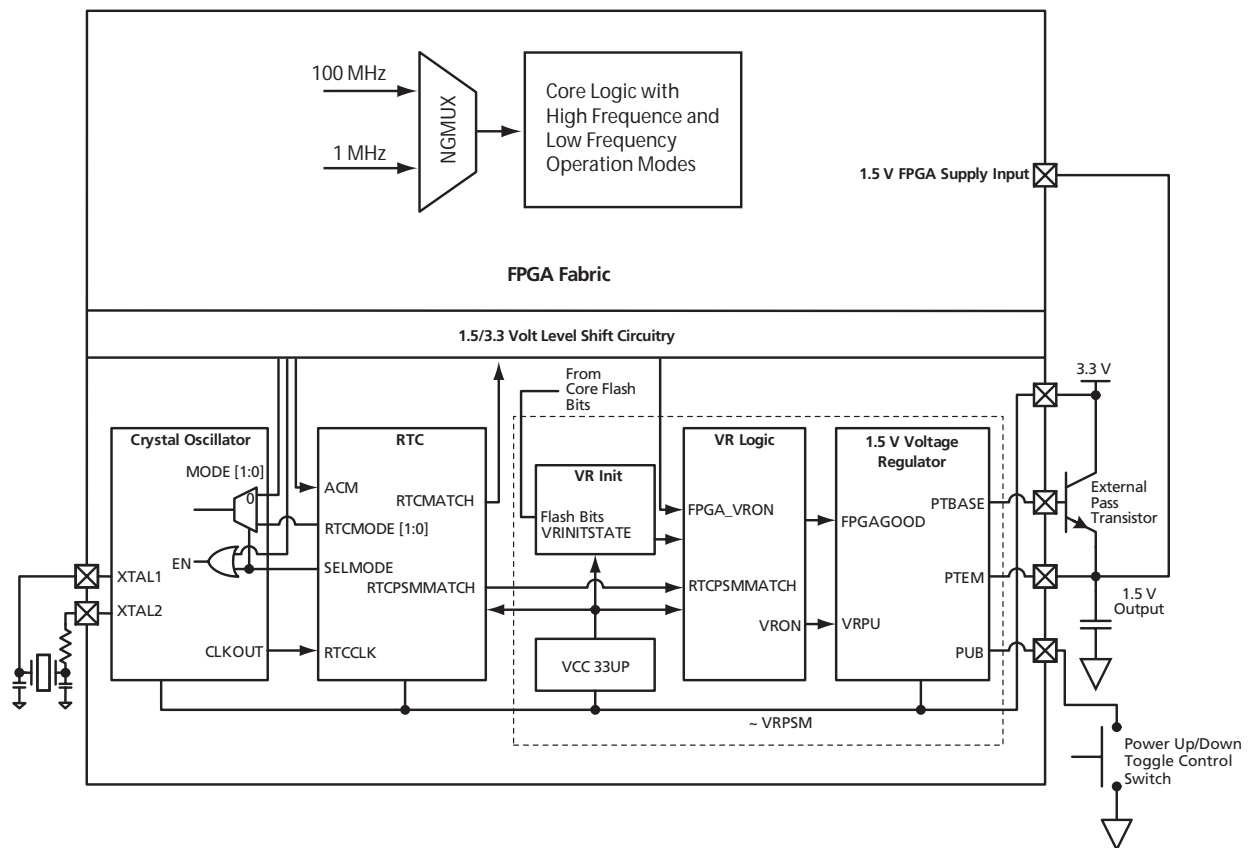


Figure 1 • Low Power Operation Implementation Diagram

Table 1 shows the different operation modes controlled by the combinations of the major functional blocks inside the Fusion device.

Table 1 • Operation Mode Table

Operation Mode	Fabric	RTC	NGMUX	Wake Up Method
Active Normal	On	On	Hi-Freq	N/A
Active Low Power	On	On	Lo-Freq	User logic
Sleep	Off	On	X	PUB pad, RTC match
Standby	Off	Off	X	PUB pad

Note: In all these operation modes, the 3.3 V analog supply is always on.

Fusion Fabric

The Fusion fabric can turn off the 1.5 V voltage regulator to initiate sleep mode with a logic function and/or soft MCU core. When the voltage regulator powers down the FPGA core will be turned off, requiring a signal external to the FPGA core to power-up the voltage regulator. While in sleep mode, the device will consume less than 200 μ A, or $3.3 \times 200 \mu$ W.

Real-Time Counter (RTC)

The RTC is running off the 3.3 V analog supply while the Fusion fabric could be powered by the internal 1.5 V voltage regulator, routed external to the chip.

The RTC can be configured to power-up the FPGA fabric at a specific time or periodically. The user logic or a soft microcontroller within the FPGA fabric portion of the Fusion device can be programmed to read and/or modify the registers in the RTC.

If the RTC is running while the Fusion fabric is powered down (Sleep Mode), RTC generates a Turn-On instruction to the 1.5 V voltage regulator when a preset match value (i.e., 2 ms) has met in the RTC. Fusion fabric is powered up once 1.5 V voltage regulator is live and Fusion device is in Active mode.

The 3.3 V supply must be valid and the crystal oscillator (nominally 32.768 kHz) must be enabled for self-time wake-up/restart operation.

Besides the Turn-On instruction from RTC, the 1.5 V voltage regulator can also be turned on by an external pad, or PUB pad. Once the PUB pad is grounded temporarily, then released, the 1.5 V voltage regulator is turned on; therefore the fabric is up and running.

The FPGA fabric portion of the Fusion device must be powered-up and active at least once to write to the various registers within the RTC to initialize them for the user’s application. The user sets up the RTC by configuring the RTC from the Actel SmartGen tools, implementing custom logic, or programming a soft microcontroller.

The user can bring the Fusion device into Standby mode if the user powers down the fabric and also turns off the RTC by disabling the crystal oscillator. The Standby mode consumes very low power of less than 10 μ A. The user can also wake up the device by grounding the PUB pad temporarily. This powers up the 1.5 V voltage regulator and the Fusion fabric. The Fusion fabric logic can enable the crystal oscillator which turns on the RTC, thus the Fusion device is in Active mode.

No-Glitch MUX (NGMUX)

While the Fusion device is running at Active mode, the user can choose to run the application in a low frequency mode for power consumption considerations. The user can instantiate an NGMUX to switch between high frequency clock and low frequency clock based on any preset internal conditions or external events. This way, the Fusion device can work in the Active Normal mode when high frequency performance is needed or work in the Active Low Power mode when low power consumption is desired at a given time frame.

Summary

Actel Fusion devices are designed to operate with minimum power consumption. Supporting a wide range of power modes, Fusion can be configured to reduce power consumption in all operating conditions. These easy to use features enable the user to develop the system in a timely fashion and also to update the designs conveniently.

List of Changes

The following table lists critical changes that were made in the current version of the document.

Previous Version	Changes in Current Version (51900122-1/12.05*)	Page
51900122-0/12.05	Figure 1 was updated.	1

Note: *The part number is located on the last page of the document.

Actel and the Actel logo are registered trademarks of Actel Corporation.
All other trademarks are the property of their owners.



www.actel.com

Actel Corporation

2061 Stierlin Court
Mountain View, CA
94043-4655 USA

Phone 650.318.4200
Fax 650.318.4600

Actel Europe Ltd.

Dunlop House, Riverside Way
Camberley, Surrey GU15 3YL
United Kingdom

Phone +44 (0) 1276 401 450
Fax +44 (0) 1276 401 490

Actel Japan

www.jp.actel.com

EXOS Ebisu Bldg. 4F
1-24-14 Ebisu Shibuya-ku
Tokyo 150 Japan

Phone +81.03.3445.7671
Fax +81.03.3445.7668

Actel Hong Kong

www.actel.com.cn

Suite 2114, Two Pacific Place
88 Queensway, Admiralty
Hong Kong

Phone +852 2185 6460
Fax +852 2185 6488