


ACB 56TM
USER'S MANUAL
Part Number 4021

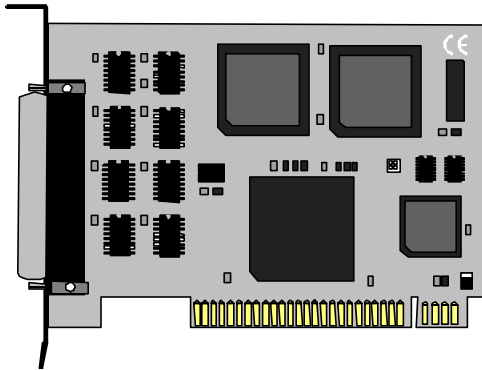

Sealevel Systems, Inc
155 Technology Place
P.O. Box 830
Liberty, SC 29657

Phone: (864) 843-4343
Fax: (864) 843-3067
www.sealevel.com

Contents

INTRODUCTION	1
OVERVIEW	1
WHAT'S INCLUDED	1
FACTORY DEFAULT SETTINGS	1
CARD SETUP.....	2
ADDRESS SELECTION.....	2
IRQ SELECTION (HEADER E6)	3
INTERFACE SELECTION.....	4
RS-232.....	4
V.35.....	4
DMA OPTIONS	4
Header E1	4
Header E7	5
Commonly Used DMA Jumper Options.....	6
Header E5	6
INSTALLATION	8
CABLING OPTIONS.....	8
SOFTWARE INSTALLATION	8
Windows Users.....	8
TECHNICAL DESCRIPTION	9
FEATURES.....	9
Internal Baud Rate Generator	9
PROGRAMMING THE ACB 56.....	10
Control/Status Port.....	10
Software Examples	10
CONNECTOR P3 PIN ASSIGNMENTS	11
RS-232 Signals	11
V.35 Signals	11
CONNECTOR P4 PIN ASSIGNMENTS	12
SPECIFICATIONS.....	13
ENVIRONMENTAL SPECIFICATIONS	13
POWER CONSUMPTION.....	13
MEAN TIME BETWEEN FAILURES (MTBF).....	13
PHYSICAL DIMENSIONS	13
APPENDIX A - TROUBLESHOOTING.....	14
APPENDIX B - HOW TO GET ASSISTANCE.....	16

APPENDIX C - ELECTRICAL INTERFACE.....	17
RS-232.....	17
V.35.....	18
APPENDIX D - DIRECT MEMORY ACCESS	19
APPENDIX E - ASYNCHRONOUS AND SYNCHRONOUS COMMUNICATIONS.....	20
ASYNCHRONOUS COMMUNICATIONS	20
SYNCHRONOUS COMMUNICATIONS	22
APPENDIX F - ACB DEVELOPER TOOLKIT DISKETTE AND ACB RESOURCE KIT.....	24
APPENDIX G - SILK-SCREEN	25
APPENDIX H - COMPLIANCE NOTICES	26
FEDERAL COMMUNICATIONS COMMISSION STATEMENT.....	26
EMC DIRECTIVE STATEMENT	26
WARRANTY.....	27

Figures

Figure 1 - Address Selection Table	2
Figure 2 - DIP-Switch Illustration.....	2
Figure 3 - Header E6, IRQ Selection.....	3
Figure 4 - Header E1, DMA Options	4
Figure 5 - Header E7, DMA Options	5
Figure 6 - Commonly Used DMA Options	6
Figure 7 - Header E5, Clock Input Modes.....	7
Figure 8 - Control/Status Register Bit Definitions	10
Figure 9 - Control/Status Register Examples.....	10
Figure 10 - Asynchronous Communications Bit Diagram.....	21
Figure 11 - Synchronous Communications Bit Diagram.....	22

Introduction

Overview

The Sealevel Systems **ACB 56** provides the PC with one high speed RS-232 (V.24) or V.35 sync/async port and one RS-232 port suitable for use as a CSU command port. The **ACB 56** can be used in a variety of sophisticated communications applications such as SDLC, HDLC, X.25, and high speed async.

What's Included

The **ACB 56** is shipped with the following items. If any of these items are missing or damaged, contact the supplier.

- **ACB 56** Adapter
- **ACB** Software
- User manual

Factory Default Settings

The **ACB 56** factory default settings are as follows:

Base Address	DMA Channel	IRQ	Electrical Specification
238	TX: 1/RX: 3	5	V.35

To install the **ACB 56** using factory default settings, refer to the section on Installation.

For your reference, record installed **ACB 56** settings below:

Base Address	DMA Channel	IRQ	Electrical Specification

Card Setup

The **ACB 56** contains several jumper straps for each port which must be set for proper operation.

Address Selection

The **ACB 56** occupies 8 consecutive I/O locations. A DIP-switch (SW1) is used to set the base address for these locations. Be careful when selecting the base address as some selections conflict with existing PC ports. The following table shows several examples that usually do not cause a conflict.

Address	Binary	Switch Settings						
		1	2	3	4	5	6	7
238-23F	1000111XXX	Off	On	On	On	Off	Off	Off
280-287	1010000XXX	Off	On	Off	On	On	On	On
2A0-2A7	1010100XXX	Off	On	Off	On	Off	On	On
2E8-2EF	1011101XXX	Off	On	Off	Off	Off	On	Off
300-307	1100000XXX	Off	Off	On	On	On	On	On
328-32F	1100101XXX	Off	Off	On	On	Off	On	Off
3E8-3EF	1111101XXX	Off	Off	Off	Off	Off	On	Off

Figure 1 - Address Selection Table

The following illustration shows the correlation between the DIP-switch setting and the address bits used to determine the base address. In the example below, the address 300 Hex through 307 Hex is selected. 300 Hex = 11 0000 0XXX in binary representation.

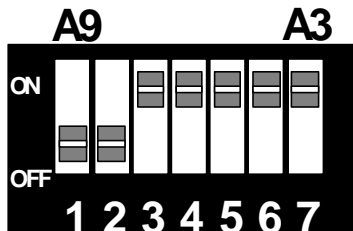


Figure 2 - DIP-Switch Illustration

Note: Setting the switch 'On' or 'Closed' corresponds to a '0' in the address, while leaving it 'Off' or 'Open' corresponds to a '1'.

The relative I/O address of the 8530 SCC registers is as follows:

Base+0 Channel A Data Port

Base+1 Channel A Control Port

Base+2 Channel B Data Port


Base+3 Channel B Control Port

Base+4 Board Control/Status Port

Where 'Base' is the selected board base address.

IRQ Selection (Header E6)

The **ACB 56** has an interrupt selection jumper which should be set prior to use, if an interrupt is required by your application software. Consult the user manual for the application software being used to determine the proper setting. **E6** selects the interrupt request line (IRQ) for the **ACB 56**. The diagram below shows IRQ 5 selected in a non-shared configuration. If no interrupt is desired, remove both jumpers.

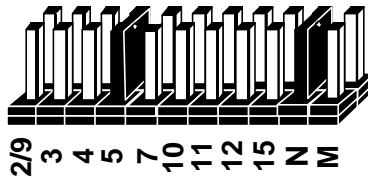

2/9	Selects IRQ2/9
3	Selects IRQ3
4	Selects IRQ4
5	Selects IRQ5
7	Selects IRQ7
10	Selects IRQ10
11	Selects IRQ11
12	Selects IRQ12
15	Selects IRQ15
N	Selects Normal (1 IRQ Per Board) IRQ Mode
M	Selects 'Multi-IRQ' (Shared) IRQ Mode

Figure 3 - Header E6, IRQ Selection (Shown in Factory Default)

Interface Selection

RS-232

A DIP-shunt placed at E9 selects RS-232 (V.24).

V.35


A DIP-shunt placed at E10 selects V.35.

DMA Options

Headers E1 and E7 select the **Direct Memory Access (DMA)** mode of operation for the **ACB 56**. Channel A of the SCC can operate in either half-duplex or full duplex DMA mode. Full duplex DMA can transmit and receive data simultaneously. Half-duplex DMA can transmit or receive data, but not in both directions simultaneously.

Note: If DMA is not used, remove all of the jumpers on E1 and E7. Refer to Page 6 for the most common DMA settings.


Header E1



1	DACK 1 Or 3 Acknowledge For Two Channel Mode
2	Two Channel A/B Mode A3B1
3	Two Channel A/B Mode A1B3
4	On = Ch. A Only / Off = Ch. B Only
5	DACK 3 DMA Acknowledge Channel 3
6	DACK 1 DMA Acknowledge Channel 1

Figure 4 - Header E1

Header E7

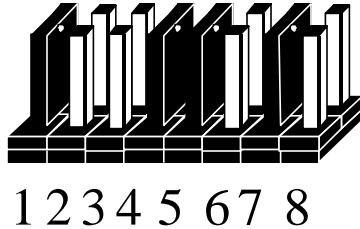

1	A or B Ch 3
2	A only Ch 3
3	A or B Ch 1
4	A only Ch 1
5	B Enable
6	A Full Duplex
7	DMA Tri-State drivers permanently enabled
8	DMA Tri-State drivers enabled by status / control port bit 7

Figure 5 - Header E7 (Factory Default)

Positions 7 and 8 of Header E7 enable or disable DMA operation. A jumper 'ON' position 7 permanently enables the DMA tri-state drivers. A jumper 'ON' position 8 places DMA under software control via the DMA enable control port bit (located at Base+4). **Removing the jumper disables the drivers, and no DMA can be performed.**

Note: The power on reset signal disables the DMA enable signal. A jumper placed in position 7 of E7 will override any software use of the DMA enable/disable status port bit.

Commonly Used DMA Jumper Options


Option	E1	E7	Program 8530
No DMA	None	None	N/A
Single Channel DMA (Half-Duplex Only):			
DMA Ch.1 Half Duplex	4,6	4	WAIT/REQ A
DMA Ch.3 Half Duplex.	4,5	2	WAIT/REQ A
Full Duplex using Both DMA Channels 1 and 3:			
Ch.A DMA Ch.1 Receive Data	1,4	1,4,6	WAIT/REQ A DTR/REQ A
Ch.A DMA Ch.3 Transmit Data	1,4	2,3,6	WAIT/REQ A DTR/REQ A

Figure 6 - Commonly Used DMA Options

Remember that E7 positions 7 and 8 enable or disable DMA operation.

Header E5

Header E5 controls the clock input modes for the **ACB 56**. The input clocks for the SCC can be set in either a non-inverted mode or in an inverted mode for application compatibility.



RC	Normal 'non-inverted' Receive Clock Input (RTXC).
RI	Inverted Receive Clock Input.
TC	Normal 'non-inverted' Transmit Clock Input (TRXC).
TI	Inverted Transmit Clock Input.
TN	Transmit Clock Input enable.

Figure 7 - Header E5

Installation

The **ACB 56** can be installed in any of the PC expansion slots, but to access the 'AT' or (E)ISA IRQ's (10, 11, 12, 15) it must be installed in one of the 16 bit slots. The **ACB 56** contains several jumper straps for each port which must be set for proper operation prior to installing the card into the computer.

1. Turn off PC power. Disconnect the power cord.
2. Remove the PC case cover.
3. Locate an available slot and remove the blank metal slot cover.
4. Gently insert the **ACB 56** into the slot. Make sure that the adapter is seated properly.
5. Replace the cover.
6. Connect the power cord.

Installation is complete.

Cabling Options

The **ACB 56** has a number of cabling options available. These options include:

- **CA-103** - This cable provides a high quality shielded cable with the V.35 mechanical specification met on one end and a DB-25S (female) on the other end. V.35 has a mechanical specification that is impossible to place on a PC bracket and requires this adapter cable.
- **CA-104** - This cable provides a 6' extension for use with RS-232 and V.35.

Software Installation

Windows Users

Choose **Install Software** at the beginning of the CD and select **Synchronous/Asynchronous Software** and install the **SeaMAC** software.

Technical Description

The **ACB 56** utilizes the Zilog 85230 Enhanced Serial Communications Controller (ESCC). This chip features programmable baud rate, data format and interrupt control, as well as DMA control. Refer to the this Users Manual and the Zilog SCC Handbook for details on programming the 85230 ESCC chip.

Features

- One channel of Sync/Async communications using 85230
- DMA supports data rate greater than 1 million bps (Bits Per Second)
- SCC channel B asynchronous port for CSU/DSU Command Port
- Selectable port address, IRQ level (2/9, 3, 4, 5, 10, 11, 12, 15), and DMA Channel (1 or 3)

Internal Baud Rate Generator

The baud rate of the SCC is programmed under software control. The standard oscillator supplied with the board is 7.3728 MHz. However, other oscillator values can be substituted to achieve different baud rates.

Programming The ACB 56

Control/Status Port

The **ACB 56** occupies eight **Input/Output (I/O)** addresses. The first four are used by the SCC chip, while the fifth address (Base+4) is the address of the on-board **Control/Status Port**. This port is used to set the **Data Terminal Ready (DTR)** signal, to enable or disable DMA under program control, and to monitor the **Data Set Ready (DSR)** input signals from the modem. The following table lists bit positions of the Control/Status Port.

Bit	Output Port Bits	Input Port Bits
0	DTR A 1=On, 0=Off	DSR A 1=On, 0=Off
1	DTR B 1=On, 0=Off	DSR B 1=On, 0=Off
2	Not Used	Not Used
3	Not Used	Not Used
4	Not Used	Not Used
5	Not Used	Not Used
6	Not Used	Not Used
7	DMA Enable 1=On, 0=Off	Not Used

Figure 8 - Control/Status Register Bit Definitions

Software Examples

Function	Program Bits
Turn On CH. A DTR	Write Out Base+4,XXXX XXX1
Turn On CH. B DTR	Write Out Base+4,XXXX XX1X
Turn Off CH. A DTR	Write Out Base+4,XXXX XXX0
Turn Off CH. B DTR	Write Out Base+4,XXXX XX0X
Enable DMA Drivers	Write Out Base+4,1XXX XXXX
Disable DMA Drivers	Write Out Base+4,0XXX XXXX
Test CH. A DSR	Read In Base+4, Mask=0000 0001
Test CH. B DSR	Read In Base+4, Mask=0000 0010

Figure 9 - Control/Status Register Examples

Connector P3 Pin Assignments

RS-232 Signals

Signal	Name	Pin #	Mode
GND	Ground	7	
RD	Receive Data	3	Input RS-232
CTS	Clear To Send	5	Input RS-232
DSR	Data Set Ready	6	Input RS-232
DCD	Data Carrier. Detect	8	Output RS-232
TD	Transmit Data	2	Output RS-232
RTS	Request to Send	4	Output RS-232
TXC	Transmit Clock	15	Input/Output RS-232
RXC	Receive Clock	17	Input RS-232
TSET	Transmit Signal Element Timing	24	Output RS-232
DTR	Data Terminal Ready	20	Output RS-232

Note: These assignments meet the EIA/TIA/ANSI-232E DTE Specification.

V.35 Signals

Signal	Name	DB-25	V.35	Mode
GND	Ground	7	B	
RDB RX+	Receive Positive	16	T	Input
RDA RX-	Receive Negative	3	R	Input
TXCB TXC+	Transmit Clock Positive	12	AA	Input
TXCA TXC-	Transmit Clock Negative	15	Y	Input
RXCB RXC+	Receive Clock Positive	9	X	Input
RXCA RXC-	Receive Clock Negative	17	V	Input
TDB TX+	Transmit Positive	14	S	Output
TDA TX-	Transmit Negative	2	P	Output
TSETB TSET+	TSET Positive	11	W	Output
TSETA TSET-	TSET Negative	24	U	Output
CTS	Clear To Send	5	D	Input*
DSR	Data Set Ready	6	E	Input*
DCD	Data Carrier Detect	8	F	Input*
DTR	Data Terminal Ready	20	H	Output*
RTS	Request To Send	4	C	Output*

* **Note:** All modem control signals are single ended (unbalanced) with RS-232 signal levels.

Connector P4 Pin Assignments

RS-232 Signals

Signal	Name	Pin #	Mode
GND	Ground	5	
RD	Receive Data	2	Input RS-232
CTS	Clear To Send	8	Input RS-232
DSR	Data Set Ready	6	Input RS-232
DCD	Data Carrier Detect	1	Input RS-232
RI	Ring Indicator	9	Input RS-232
TD	Transmit Data	3	Output RS-232
RTS	Request To Send	7	Output RS-232
DTR	Data Terminal Ready	4	Output RS-232

These Pin Assignments meet the EIA/TIA/ANSI-574 DTE Specification.

Technical Note: Please terminate any control signals that are not going to be used. The most common way to do this is connect RTS to CTS and RI. Also, connect DCD to DTR and DSR. Terminating these pins, if not used, will help insure you get the best performance from your adapter.

Specifications

Environmental Specifications

Specification	Operating	Storage
Temperature Range	0° to 50° C (32° to 122° F)	-20° to 70° C (-4° to 158° F)
Humidity Range	10 to 90% R.H. Non-Condensing	10 to 90% R.H. Non-Condensing

Power Consumption

Supply line	+12 VDC	-12 VDC	+5 VDC
Rating	50 mA	50 mA	410 mA

Mean Time Between Failures (MTBF)

Greater than 150,000 hours. (Calculated)

Physical Dimensions

Board length	6.6 inches	(16.76 cm)
Board Height including Goldfingers	4.2 inches	(10.66 cm)
Board Height excluding Goldfingers	3.9 inches	(9.91 cm)

Appendix A - Troubleshooting

An ACB Developers Toolkit Diskette is supplied with the Sealevel Systems adapter and will be used in the troubleshooting procedures. By using this diskette and following these simple steps, most common problems can be eliminated without the need to call Technical Support.

1. Identify all I/O adapters currently installed in your system. This includes your on-board serial ports, controller cards, sound cards etc. The I/O addresses used by these adapters, as well as the IRQ (if any) should be identified.
2. Configure your Sealevel Systems adapter so that there is no conflict with currently installed adapters. No two adapters can occupy the same I/O address.
3. Make sure the Sealevel Systems adapter is using a unique IRQ. While the Sealevel Systems adapter does allow the sharing of IRQ's, many other adapters (i.e. SCSI adapters & on-board serial ports) do not. The IRQ is typically selected via an on-board header block. Refer to the section on Card Setup for help in choosing an I/O address and IRQ.
4. Make sure the Sealevel Systems adapter is securely installed in a motherboard slot.
5. Use the supplied diskette and User Manual to verify that the Sealevel Systems adapter is configured correctly. The supplied diskette contains a diagnostic program 'SSDACB' that will verify if an adapter is configured properly. This diagnostic program is written with the user in mind and is easy to use. Refer to the 'UTIL.txt' file found in the /UTIL sub-directory on the supplied diskette for detailed instructions on using 'SSDACB'.

6. The following are known I/O conflicts:

- The 278 and 378 settings may conflict with your printer I/O adapter.
- 3B0 cannot be used if a Monochrome adapter is installed.
- 3F8-3FF is typically reserved for COM1:.
- 2F8-2FF is typically reserved for COM2:.
- 3E8-3EF is typically reserved for COM3:.
- 2E8-2EF is typically reserved for COM4:.. This is a valid setup option for the **ACB 56**. However, since only 10 address lines are actually decoded, a possible conflict with an advanced video card emulating the IBM XGA adapter (8514 register set) may occur.

Appendix B - How To Get Assistance

Please refer to Appendix A - Troubleshooting prior to calling Technical Support.

1. Read this manual thoroughly before attempting to install the adapter in your system.
2. When calling for technical assistance, please have your user manual and current adapter settings. If possible, please have the adapter installed in a computer ready to run diagnostics.
3. Sealevel Systems maintains a forum on CompuServe which can be accessed by typing 'GO Sealevel' at the command prompt.
4. Sealevel Systems maintains a web page on the World Wide Web, www.sealevel.com, providing utilities and new product information. This forum is accessed via the Internet.
5. Technical support is available Monday to Friday from 8:00 a.m. to 5:00 p.m. Eastern time. Technical support can be reached at (864) 843-4343.

RETURN AUTHORIZATION MUST BE OBTAINED FROM SEALEVEL SYSTEMS BEFORE RETURNED MERCHANDISE WILL BE ACCEPTED. AUTHORIZATION CAN BE OBTAINED BY CALLING SEALEVEL SYSTEMS AND REQUESTING A RETURN MERCHANDISE AUTHORIZATION (RMA) NUMBER.

Appendix C - Electrical Interface

RS-232

Quite possibly the most widely used communication standard is RS-232. This implementation has been defined and revised several times and is often referred to as RS-232 or EIA/TIA-232. It is defined by the EIA as the *Interface between Data Terminal Equipment and Data Circuit-Terminating Equipment Employing Serial Binary Data Interchange*. The mechanical implementation of RS-232 is on a 25 pin D sub connector. The IBM PC computer defined the RS-232 port on a 9 pin D sub connector and subsequently the EIA/TIA approved this implementation as the EIA/TIA-574 standard. This standard is defined as the *9-Position Non-Synchronous Interface between Data Terminal Equipment and Data Circuit-Terminating Equipment Employing Serial Binary Data Interchange*. Both implementations are in wide spread use and will be referred to as RS-232 in this document. RS-232 is capable of operating at data rates up to 20 Kbps at distances less than 50 ft. The absolute maximum data rate may vary due to line conditions and cable lengths. RS-232 often operates at 38.4 Kbps over very short distances. The voltage levels defined by RS-232 range from -12 to +12 volts. RS-232 is a single ended or unbalanced interface, meaning that a single electrical signal is compared to a common signal (ground) to determine binary logic states. A voltage of +12 volts (usually +3 to +10 volts) represents a binary 0 (space) and -12 volts (-3 to -10 volts) denotes a binary 1 (mark). The RS-232 and the EIA/TIA-574 specification defines two type of interface circuits, Data Terminal Equipment (DTE) and Data Circuit-Terminating Equipment (DCE). The Sealevel Systems adapter is a DTE interface.

V.35

V.35 is a standard defined by ITU (formerly CCITT) that specifies an electrical, mechanical, and physical interface that is used extensively by high-speed digital carriers such as AT&T Dataphone Digital Service (DDS). ITU V.35 is an international standard that is often referred to as *Data Transmission at 48 Kbps Using 60 - 108 KHz Group-Band Circuits*. ITU V.35 electrical characteristics are a combination of unbalanced voltage and balanced current mode signals. Data and clock signals are balanced current mode circuits. These circuits typically have voltage levels from 0.5 Volts to -0.5 Volts (1 Volt differential). The modem control signals are unbalanced signals and are compatible with RS-232. The physical connector is a 34 pin connector that supports 24 data, clock and control signals. The physical connector is defined in the ISO-2593 standard. ITU V.35 specification defines two type of interface circuits, Data Terminal Equipment (DTE) and Data Circuit-Terminating Equipment (DCE). The Sealevel Systems adapter is a DTE interface.

Appendix D - Direct Memory Access

In many instances it is necessary to transmit and receive data at greater rates than would be possible with simple port I/O. In order to provide a means for higher rate data transfers, a special function called **Direct Memory Access (DMA)** was built into the original IBM PC. The DMA function allows the **ACB 56** (or any other DMA compatible interface) to read or write data to or from memory without using the Microprocessor. This function was originally controlled by the Intel 8237 DMA controller chip, but may now be a combined function of the peripheral support chip sets (i.e. Chips & Technology or Symphony chip sets).

During a DMA cycle the DMA controller chip is driving the system bus in place of the Microprocessor, providing address and control information. When an interface needs to use DMA it activates a DMA request signal (DRQ) to the DMA controller, which in turn sends a DMA hold request to the Microprocessor. When the Microprocessor receives the hold request it will respond with an acknowledge to the DMA controller chip. The DMA controller chip then becomes a Bus Master providing the necessary control signals to complete a Memory to I/O or I/O to Memory transfer. When the data transfer is started an acknowledge signal (DACK) is sent by the DMA controller chip to the **ACB 56**. Once the data has been transferred to or from the **ACB 56**, the DMA controller returns control to the Micro-processor.

To use DMA with the **ACB 56** requires a thorough understanding of the PC DMA functions . The ACB Developers Toolkit demonstrates the setup and use of DMA with several source code and high level language demo programs. Please refer to the SCC User's Manual, the PC Technical Reference and the 8237 DMA controller chip specification for more information.

Appendix E - Asynchronous and Synchronous Communications

Serial data communications implies that individual bits of a character are transmitted consecutively to a receiver that assembles the bits back into a character. Data rate, error checking, handshaking, and character framing (start/stop bits or sync characters) are pre-defined and must correspond at both the transmitting and receiving ends. The techniques used for serial communications can be divided two groups, *asynchronous* and *synchronous*.

When contrasting asynchronous and synchronous. serial communications, the fundamental differences deal with how each method defines the beginning and end of a character or group of characters. The method of determining the duration of each bit in the data stream is also an important difference between asynchronous and synchronous communications. The remainder of this section is devoted to detailing the differences between character framing and bit duration implemented in asynchronous and synchronous communications.

Asynchronous Communications

Asynchronous communications is the standard means of serial data communication for PC compatibles and PS/2 computers. The original PC was equipped with a communication or COM: port that was designed around an 8250 Universal Asynchronous Receiver Transmitter (UART). This device allows asynchronous serial data to be transferred through a simple and straightforward programming interface. Character boundaries for asynchronous communications are defined by a starting bit followed by a pre-defined number of data bits (5, 6, 7, or 8). The end of the character is defined by the transmission of a pre-defined number of stop bits (usually 1, 1.5 or 2). An extra, bit used for error detection, is often appended before the stop bits.

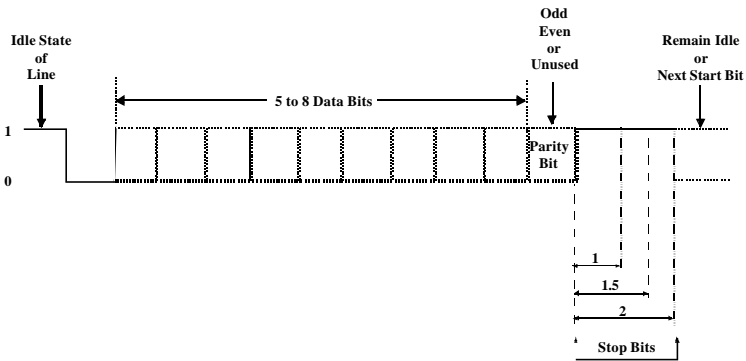


Figure 10 - Asynchronous Communications Bit Diagram

This special bit is called the parity bit. Parity is a simple method of determining if a data bit has been lost or corrupted during transmission. There are several methods for implementing a parity check to guard against data corruption. Common methods are called (E)ven Parity or (O)dd Parity. Sometimes parity is not used to detect errors on the data stream. This is referred to as (N)o parity. Because each bit in asynchronous communications is sent consecutively, it is easy to generalize asynchronous communications by stating that each character is wrapped (framed) by pre-defined bits to mark the beginning and end of the serial transmission of the character. The data rate and communication parameters for asynchronous communications have to be the same at both the transmitting and receiving ends. The communication parameters are baud rate, parity, number of data bits per character, and stop bits (i.e. 9600,N,8,1).

Synchronous Communications

Synchronous Communications is used for applications that require higher data rates and greater error checking procedures. Character synchronization and bit duration are handled differently than asynchronous communications. Bit duration in synchronous communications is not necessarily pre-defined at both the transmitting and receiving ends. Typically, in addition to the data signal, a clock signal is provided. This clock signal will mark the beginning of a bit cell on a pre-defined transmission. The source of the clock is predetermined and sometimes multiple clock signals are available. For example, if two nodes want to establish synchronous communications, point A could supply a clock to point B that would define all bit boundaries that A transmitted to B. Point B could also supply a clock to point A that would correspond to the data that A received from B. This example demonstrates how communications could take place between two nodes at completely different data rates. Character synchronization with synchronous communications is also very different than the asynchronous method of using start and stop bits to define the beginning and end of a character. When using synchronous communications a pre-defined character or sequence of characters is used to let the receiving end know when to start character assembly.

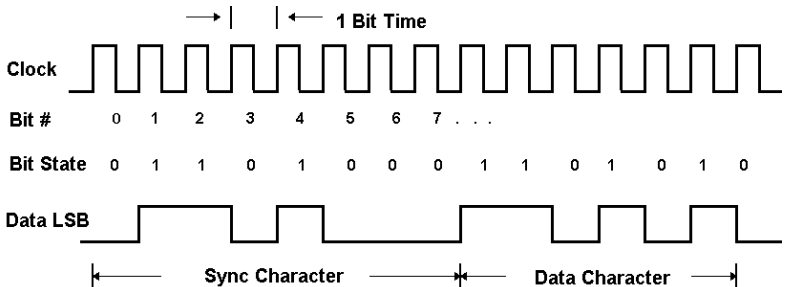


Figure 11 - Synchronous Communications Bit Diagram

This pre-defined character is called a sync character or sync flag. Once the sync flag is received, the communications device will start character assembly. Sync characters are typically transmitted while the communications line is idle or immediately before a block of information is transmitted. To illustrate with an example, let's assume that we are communicating using eight bits per character. Point A is receiving a clock from point B and sampling the receive data pin on every upward clock transition. Once point A receives the pre-defined bit pattern (sync flag), the next eight bits are assembled into a valid character. The following eight bits are also assembled into a character. This will repeat until another pre-defined sequence of bits is received (either another sync flag or a bit combination that signals the end of the text, e.g., EOT). The actual sync flag and protocol varies depending on the sync format (SDLC, BISYNC, etc.).

For a detailed explanation of serial communications, please refer to the book *Technical Aspects of Data Communications* by John E. McNamara, published by Digital Press (DEC) 1982.

Appendix F - ACB Developer Toolkit Diskette and ACB Resource Kit

The ACB Developer Toolkit diskette provides sample software, DOS and Windows Drivers, and technical insight to aid in the development of reliable applications for the ACB family of communication cards. The goal in publishing this collection of source code and technical information is two fold. First, to provide the developer with ample information to develop ACB based applications. Second, to provide a channel for suggestions into the technical support efforts. The ACB Resource Kit provides a brief overview of the ACB product line and is available at your request. Topics concerning applications and integration are covered to provide a complete overview of the versatile ACB family. During ACB development, if any questions, comments, or suggestions arise, please contact Technical Support at the numbers listed at the end of this manual.

Free Updates to the ACB Developer Toolkit diskette are available at both our CompuServe Forum (Go Sealevel) and via the Sealevel WWW Site (www.sealevel.com).

Appendix H - Compliance Notices

Federal Communications Commission Statement

FCC - This equipment has been tested and found to comply with the limits for Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in such case the user will be required to correct the interference at his own expense.

EMC Directive Statement



Products bearing the CE Label fulfill the requirements of the EMC directive (89/336/EEC) and of the low-voltage directive (73/23/EEC) issued by the European Commission.

To obey these directives, the following European standards must be met:

- **EN55022 Class A** - “Limits and methods of measurement of radio interference characteristics of information technology equipment”
- **EN55024** - Information technology equipment Immunity characteristics Limits and methods of measurement.
- **EN60950 (IEC950)** - “Safety of information technology equipment, including electrical business equipment”

Warning

This is a Class A Product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Always use cabling provided with this product if possible. If no cable is provided or if an alternate cable is required, use high quality shielded cabling to maintain compliance with FCC/EMC directives.

Warranty

Sealevel Systems, Inc. provides a lifetime warranty for this product. Should this product fail to be in good working order at any time during this period, Sealevel Systems will, at its option, replace or repair it at no additional charge except as set forth in the following terms. This warranty does not apply to products damaged by misuse, modifications, accident or disaster.

Sealevel Systems assumes no liability for any damages, lost profits, lost savings or any other incidental or consequential damage resulting from the use, misuse of, or inability to use this product. Sealevel Systems will not be liable for any claim made by any other related party.

RETURN AUTHORIZATION MUST BE OBTAINED FROM SEALEVEL SYSTEMS BEFORE RETURNED MERCHANDISE WILL BE ACCEPTED. AUTHORIZATION CAN BE OBTAINED BY CALLING SEALEVEL SYSTEMS AND REQUESTING A RETURN MERCHANDISE AUTHORIZATION (RMA) NUMBER.

Sealevel Systems, Incorporated
155 Technology Place
P.O. Box 830
Liberty, SC 29657 USA
(864) 843-4343 FAX: (864) 843-3067
www.sealevel.com
email: support@sealevel.com

Technical Support is available from 8 a.m. to 5 p.m. Eastern time.
Monday - Friday

Trademarks

Sealevel Systems, Incorporated acknowledges that all trademarks referenced in this manual are the service mark, trademark, or registered trademark of the respective company.

ACB 56 is a trademark of Sealevel Systems, Incorporated.