

Features

- 5 ns pin-to-pin logic delays
- System frequency up to 178 MHz
- 72 macrocells with 1,600 usable gates
- Available in small footprint packages
 - 44-pin PLCC (34 user I/O pins)
 - 48-pin CSP (38 user I/O pins)
 - 64-pin VQFP (52 user I/O pins)
 - 100-Pin TQFP (72 user I/O pins)
- Optimized for high-performance 3.3 V systems
 - Low power operation
 - 5 V tolerant I/O pins accept 5 V, 3.3 V, and 2.5 V signals
 - 3.3 V or 2.5 V output capability
 - Advanced 0.35 micron feature size CMOS FastFLASH™ technology
- Advanced system features
 - In-system programmable
 - Superior pin-locking and routability with FastCONNECT II™ switch matrix
 - Extra wide 54-input Function Blocks
 - Up to 90 product-terms per macrocell with individual product-term allocation
 - Local clock inversion with 3 global and one product-term clocks
 - Individual output enable per output pin
 - Input hysteresis on all user and boundary-scan pin inputs
 - Bus-hold circuitry on all user pin inputs
 - Full IEEE Standard 1149.1 boundary-scan (JTAG)
- Fast concurrent programming
- Slew rate control on individual outputs
- Enhanced data security features
- Excellent quality and reliability
 - Endurance exceeding 10,000 program/erase cycles
 - 20 year data retention
 - ESD protection exceeding 2,000 V
- Pin-compatible with 5 V-core XC9572 device in the 44-pin PLCC package and the 100-pin TQFP package

Description

The XC9572XL is a 3.3 V CPLD targeted for high-performance, low-voltage applications in leading-edge communications and computing systems. It is comprised of four 54V18 Function Blocks, providing 1,600 usable gates with propagation delays of 4 ns. See Figure 2 for architecture overview.

Power Estimation

Power dissipation in CPLDs can vary substantially depending on the system frequency, design application and output loading. To help reduce power dissipation, each macrocell in a XC9500XL device may be configured for low-power mode (from the default high-performance mode). In addition, unused product-terms and macrocells are automatically deactivated by the software to further conserve power.

For a general estimate of I_{CC} , the following equation may be used:

$$I_{CC} \text{ (mA)} = MC_{HP}(0.5) + MC_{LP}(0.3) + MC(0.0045 \text{ mA/MHz}) f$$

Where:

MC_{HP} = Macrocells in high-performance (default) mode

MC_{LP} = Macrocells in low-power mode

MC = Total number of macrocells used

f = Clock frequency (MHz)

This calculation is based on typical operating conditions using a pattern of 16-bit up/down counters in each Function Block with no output loading. The actual I_{CC} value varies with the design application and should be verified during normal system operation.

Figure 1 shows the above estimation in a graphical form.

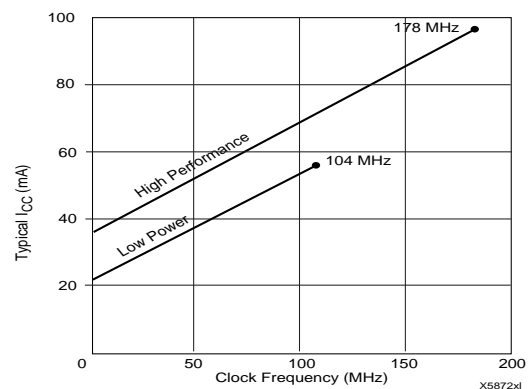


Figure 1: Typical I_{CC} vs. Frequency for XC9572XL

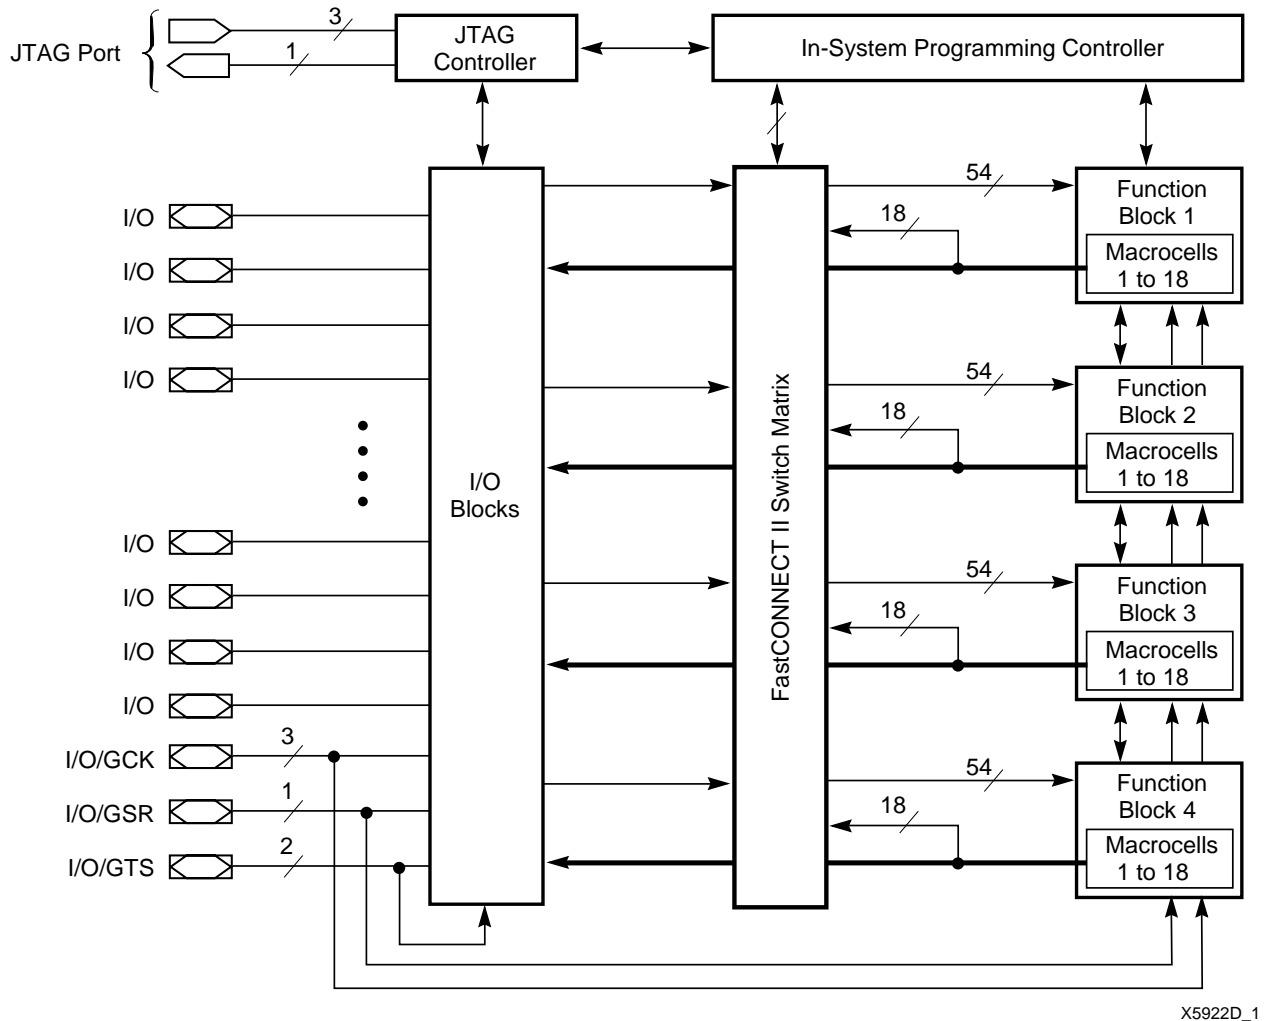


Figure 2: XC9572XL Architecture

Function Block outputs (indicated by the bold line) drive the I/O Blocks directly.

Absolute Maximum Ratings

Symbol	Description	Value	Units
V_{CC}	Supply voltage relative to GND	-0.5 to 4.0	V
V_{IN}	Input voltage relative to GND (Note 1)	-0.5 to 5.5	V
V_{TS}	Voltage applied to 3-state output (Note 1)	-0.5 to 5.5	V
T_{STG}	Storage temperature (ambient)	-65 to +150	°C
T_{SOL}	Maximum soldering temperature (10s @ 1/16 in. = 1.5 mm)	+260	°C
T_J	Junction temperature	+150	°C

Note 1: Maximum DC undershoot below GND must be limited to either 0.5 V or 10 mA, whichever is easier to achieve. During transitions, the device pins may undershoot to -2.0 V or overshoot to +7.0 V, provided this over- or undershoot lasts less than 10 ns and with the forcing current being limited to 200 mA.

Note 2: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time may affect device reliability.

Recommended Operation Conditions

Symbol	Parameter	Min	Max	Units	
V_{CCINT}	Supply voltage for internal logic and input buffers	Commercial $T_A = 0^{\circ}\text{C}$ to 70°C	3.0	3.6	V
		Industrial $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	3.0	3.6	V
V_{CCIO}	Supply voltage for output drivers for 3.3 V operation	3.0	3.6	V	
	Supply voltage for output drivers for 2.5 V operation	2.3	2.7	V	
V_{IL}	Low-level input voltage	0	0.80	V	
V_{IH}	High-level input voltage	2.0	5.5	V	
V_O	Output voltage	0	V_{CCIO}	V	

Quality and Reliability Characteristics

Symbol	Parameter	Min	Max	Units
t_{DR}	Data Retention	20	-	Years
N_{PE}	Program/Erase Cycles (Endurance)	10,000	-	Cycles
V_{ESD}	Electrostatic Discharge (ESD)	2,000	-	Volts


DC Characteristic Over Recommended Operating Conditions

Symbol	Parameter	Test Conditions	Min	Max	Units
V_{OH}	Output high voltage for 3.3 V outputs	$I_{OH} = -4.0$ mA	2.4		V
	Output high voltage for 2.5 V outputs	$I_{OH} = -500$ μA	90% V_{CCIO}		V
V_{OL}	Output low voltage for 3.3 V outputs	$I_{OL} = 8.0$ mA		0.4	V
	Output low voltage for 2.5 V outputs	$I_{OL} = 500$ μA		0.4	V
I_{IL}	Input leakage current	$V_{CC} = \text{Max}$ $V_{IN} = \text{GND or } V_{CC}$		± 10.0	μA
I_{IH}	I/O high-Z leakage current	$V_{CC} = \text{Max}$ $V_{IN} = \text{GND or } V_{CC}$		± 10.0	μA
C_{IN}	I/O capacitance	$V_{IN} = \text{GND}$ $f = 1.0$ MHz		10.0	pF
I_{CC}	Operating Supply Current (low power mode, active)	$V_I = \text{GND}$, No load $f = 1.0$ MHz	20 (Typ)		mA

AC Characteristics

Symbol	Parameter	XC9572XL-5		XC9572XL-7		XC9572XL-10		Units
		Min ¹	Max ¹	Min	Max	Min	Max	
t _{PD}	I/O to output valid		5.0		7.5		10.0	ns
t _{SU}	I/O setup time before GCK	3.7		4.8		6.5		ns
t _H	I/O hold time after GCK	0.0		0.0		0.0		ns
t _{CO}	GCK to output valid		3.5		4.5		5.8	ns
f _{SYSTEM}	Multiple FB internal operating frequency		178.6		125.0		100.0	MHz
t _{PSU}	I/O setup time before p-term clock input	1.7		1.6		2.1		ns
t _{PH}	I/O hold time after p-term clock input	2.0		3.2		4.4		ns
t _{PCO}	P-term clock output valid		5.5		7.7		10.2	ns
t _{OE}	GTS to output valid		4.0		5.0		7.0	ns
t _{OD}	GTS to output disable		4.0		5.0		7.0	ns
t _{POE}	Product term OE to output enabled		7.0		9.5		11.0	ns
t _{POD}	Product term OE to output disabled		7.0		9.5		11.0	ns
t _{AO}	GSR to output valid		10.0		12.0		14.5	ns
t _{PAO}	P-term S/R to output valid		10.5		12.6		15.3	ns
t _{WLH}	GCK pulse width (High or Low)	2.8		4.0		4.5		ns
t _{PLH}	P-term clock pulse width (High or Low)	5.0		6.5		7.0		ns
				Advance		Preliminary		

Note 1: Please contact Xilinx for up-to-date information on advance specifications.

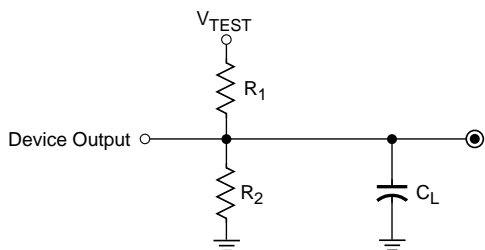

Output Type	V _{CCIO}	V _{TEST}	R ₁	R ₂	C _L
	3.3 V	3.3 V	320 Ω	360 Ω	35 pF
	2.5 V	2.5 V	250 Ω	660 Ω	35 pF

X5906A

Figure 3: AC Load Circuit

Internal Timing Parameters

Symbol	Parameter	XC9572XL-5		XC9572XL-7		XC9572XL-10		Units
		Min ¹	Max ¹	Min	Max	Min	Max	
Buffer Delays								
t _{IN}	Input buffer delay		1.5		2.3		3.5	ns
t _{GCK}	GCK buffer delay		1.1		1.5		1.8	ns
t _{GSR}	GSR buffer delay		2.0		3.1		4.5	ns
t _{GTS}	GTS buffer delay		4.0		5.0		7.0	ns
t _{OUT}	Output buffer delay		2.0		2.5		3.0	ns
t _{EN}	Output buffer enable/disable delay		0.0		0.0		0.0	ns
Product Term Control Delays								
t _{PTCK}	Product term clock delay		1.6		2.4		2.7	ns
t _{PTSR}	Product term set/reset delay		1.0		1.4		1.8	ns
t _{PTTS}	Product term 3-state delay		5.5		7.2		7.5	ns
Internal Register and Combinatorial Delays								
t _{PDI}	Combinatorial logic propagation delay		0.5		1.3		1.7	ns
t _{SUI}	Register setup time	2.3		2.6		3.0		ns
t _{HI}	Register hold time	1.4		2.2		3.5		ns
t _{ECSU}	Register clock enable setup time	2.3		2.6		3.0		ns
t _{ECHO}	Register clock enable hold time	1.4		2.2		3.5		ns
t _{COI}	Register clock to output valid time		0.4		0.5		1.0	ns
t _{AOI}	Register async. S/R to output delay		6.0		6.4		7.0	ns
t _{RAI}	Register async. S/R recover before clock	5.0		7.5		10.0		ns
t _{LOGI}	Internal logic delay		1.0		1.4		1.8	ns
t _{LOGILP}	Internal low power logic delay		5.0		6.4		7.3	ns
Feedback Delays								
t _F	FastCONNECT II™ feedback delay		1.9		3.5		4.2	ns
Time Adders								
t _{PTA}	Incremental product term allocator delay		0.7		0.8		1.0	ns
t _{SLEW}	Slew-rate limited delay		3.0		4.0		4.5	ns
			Advance		Preliminary			

Note 1: Please contact Xilinx for up-to-date information on advance specifications.

XC9572XL I/O Pins

Function Block	Macro-cell	PC44	CS48	VQ64	TQ100	BScan Order	Notes
1	1	-	-	-	16	213	
1	2	1	D7	8	13	210	
1	3	-	D4	12	18	207	
1	4	-	-	13	20	204	
1	5	2	D6	9	14	201	
1	6	3	C7	10	15	198	
1	7	-	-	-	25	195	
1	8	4	C6	11	17	192	
1	9	5	B7	15	22	189	[1]
1	10	-	-	18	28	186	
1	11	6	B6	16	23	183	[1]
1	12	-	-	23	33	180	
1	13	-	-	-	36	177	
1	14	7	A7	17	27	174	[1]
1	15	8	A6	19	29	171	
1	16	-	-	-	39	168	
1	17	9	C5	20	30	165	
1	18	-	-	-	40	162	
2	1	-	-	-	87	159	
2	2	35	F4	60	94	156	
2	3	-	-	58	91	153	
2	4	-	-	59	93	150	
2	5	36	G5	61	95	147	
2	6	37	F5	62	96	144	
2	7	-	-	-	3	141	[2]
2	8	38	G6	63	97	138	
2	9	39	G7	64	99	135	[1]
2	10	-	-	1	1	132	
2	11	40	F6	2	4	129	[1]
2	12	-	-	4	6	126	
2	13	-	-	-	8	123	
2	14	42	E6	5	9	120	[3]
2	15	43	E7	6	11	117	
2	16	-	-	-	10	114	
2	17	44	E5	7	12	111	
2	18	-	-	-	92	108	

Function Block	Macro-cell	PC44	CS48	VQ64	TQ100	BScan Order	Notes
3	1	-	-	-	41	105	
3	2	11	B5	22	32	102	
3	3	-	C4	31	49	99	
3	4	-	-	32	50	96	
3	5	12	A4	24	35	93	
3	6	-	-	34	53	90	
3	7	-	-	-	54	87	
3	8	13	B4	25	37	84	
3	9	14	A3	27	42	81	
3	10	-	D3	39	60	78	
3	11	18	B2	33	52	75	
3	12	-	-	40	61	72	
3	13	-	-	-	63	69	
3	14	19	B1	35	55	66	
3	15	20	C2	36	56	63	
3	16	24	D2	42	64	60	
3	17	22	C3	38	58	57	
3	18	-	-	-	59	54	
4	1	-	-	-	65	51	
4	2	25	E1	43	67	48	
4	3	-	-	46	71	45	
4	4	-	-	47	72	42	
4	5	26	E2	44	68	39	
4	6	-	E4	49	76	36	
4	7	-	-	-	77	33	
4	8	27	F1	45	70	30	
4	9	-	-	-	66	27	
4	10	-	-	51	81	24	
4	11	28	G1	48	74	21	
4	12	-	-	52	82	18	
4	13	-	-	-	85	15	
4	14	29	F2	50	78	12	
4	15	33	E3	56	89	9	
4	16	-	-	-	86	6	
4	17	34	G4	57	90	3	
4	18	-	-	-	79	0	

Note 1: Global control pin.

Note 2: GTS1 for TQ100


Note 3: GTS1 for PC44, CS48, VQ64

XC9572XL Global, JTAG and Power Pins

Pin Type	PC44	CS48	VQ64	TQ100
I/O/GCK1	5	B7	15	22
I/O/GCK2	6	B6	16	23
I/O/GCK3	7	A7	17	27
I/O/GTS1	42	E6	5	3
I/O/GTS2	40	F6	2	4
I/O/GSR	39	G7	64	99
TCK	17	A1	30	48
TDI	15	B3	28	45
TDO	30	G2	53	83
TMS	16	A2	29	47
V _{CCINT} 3.3 V	21, 41	C1, F7	3, 37	5, 57, 98
V _{CCIO} 2.5 V/3.3 V	32	G3	26, 55	26, 38, 51, 88
GND	10, 23, 31	A5, D1, F3	14, 21, 41, 54	21, 31, 44, 62, 69, 75, 84, 100
No Connects	-	-	-	2, 7, 19, 24, 34, 43, 46, 73, 80

Ordering Information

Example: XC9572XL -7 TQ 100 C

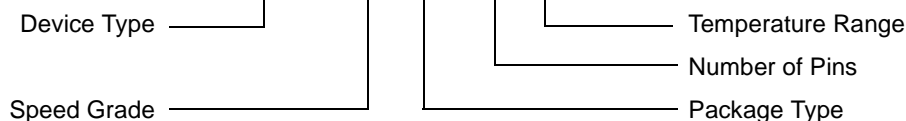

Speed Options

- 10 10 ns pin-to-pin delay
- 7 7.5 ns pin-to-pin delay
- 5 5 ns pin-to-pin delay

Packaging Options

- PC44 44-Pin Plastic Lead Chip Carrier (PLCC)
- CS48 48-Pin Chip Scale Package (CSP)
- VQ64 64-Pin Very Thin Quad Flat Pack (VQFP)
- TQ100 100-Pin Thin Quad Flat Pack (TQFP)

Temperature Options

- C = Commercial T_A = 0°C to +70°C
- I = Industrial T_A = -40°C to +85°C

Component Availability

Pins		44	48	64	100
Type		Plastic PLCC	Plastic CSP	Plastic VQFP	Plastic TQFP
Code		PC44	CS48	VQ64	TQ100
XC9572XL	-10	C, I	-	C, I	C, I
	-7	C	C	C	C
	-5	(C)	-	(C)	(C)

C = Commercial ($T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$) I = Industrial ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)

() Parenthesis indicate future planned products. Please contact Xilinx for up-to-date availability information.