



Xilinx Inc.
 2100 Logic Drive
 San Jose, CA 95124
 Phone: +1 408-559-7778
 Fax: +1 408-559-7114
 URL: www.xilinx.com/ipcenter
 Support: support.xilinx.com

Features

- Drop-in module for Virtex™-II, Virtex™-E, Virtex™, and Spartan™-II FPGAs

- Generates Add, Subtract and Add/Subtract-based accumulators
- Supports 2's complement signed and unsigned operations
- Supports inputs ranging from 1 to 256 bits wide
- Supports outputs ranging from 1 to 258 bits wide
- User programmable feedback scaling
- Optional clock enable, asynchronous and synchronous controls
- Optional non-registered output
- Optional Bypass (Load) capability
- Incorporates Xilinx Smart-IP technology for maximum performance
- To be used with version 3.1i and later of the Xilinx CORE Generator System

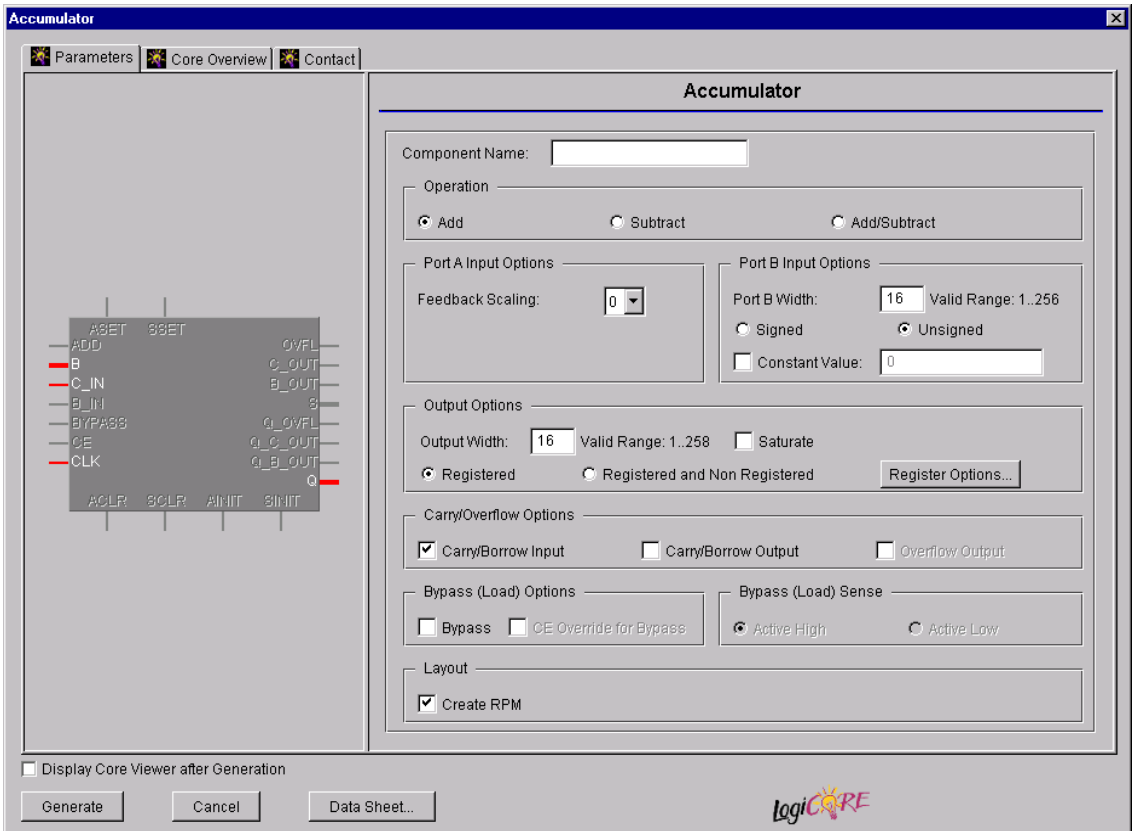


Figure 1: Main Accumulator Parameterization Screen

Functional Description

The Accumulator module can generate adder-based, subtractor-based and adder/subtractor-based accumulators operating on signed or unsigned data. Input data is provided on Port B and, optionally, the Port B value can be set to a constant. Optional carry input, and carry/borrow/overflow outputs are available. Outputs can be registered only or both registered and non-registered. Options are also provided for **Clock Enable**, **Asynchronous Set**, **Clear**, and **Init**, and **Synchronous Set**, **Clear** and **Init**. An optional **Bypass** capability is also provided which can load the value on Port B directly into the output register. The output of the accumulator can also be **saturated**. The module can optionally be generated as a Relational Placed Macro (RPM) or as unplaced logic. When an RPM is generated the logic is placed in a column.

Pinout

Signal names for the schematic symbol are shown in Figure 3 and described in Table 1. Note that Figure 3 shows the C_OUT and Q_C_OUT pins, which appear on adder and adder/subtractor-based accumulators. For a subtractor-based accumulator these pins are named B_OUT and Q_B_OUT, respectively.

CORE Generator Parameters

The main CORE Generator parameterization screen for this module is shown in Figure 1. The parameters are as follows:

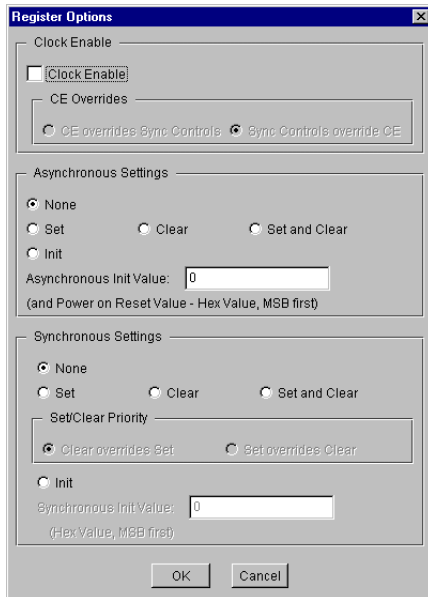


Figure 2: Accumulator Register Options Parameterization Screen

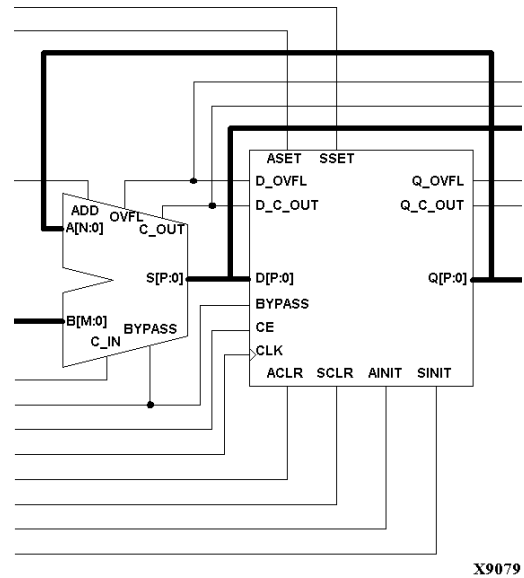


Figure 3: Core Schematic Symbol

- **Component Name:** The component name is used as the base name of the output files generated for this module. Names must begin with a letter and must be composed from the following characters: a to z, 0 to 9 and "-".
- **Operation:** Select the appropriate radio button for the accumulation operation required. The default setting is **Add**.
- **Port A Input Options:**
 - **Feedback Scaling:** Enter the scaling factor used for the feedback path to Port A. The value represents the number of low order bits which are discarded in the feedback process. The valid range is 0 to 8. The default value is 0.
 - **Port B Input Options:**
 - **Port B Width:** Enter the width of the Port B input. The valid range is 1 to 256. The default value is 16.
 - **Port B Sign:** Enter the sign of the Port B data. The default value is **Unsigned**. The data type chosen for this port defines the data type for the whole module.
 - **Constant Value:** When this check box is checked Port B is set to the value that is typed into the adjacent text box. The Constant Value must be entered in hex format and must not exceed the specified **Port B Width**. In most cases specifying Port B to be a constant will create a module without Port B. The only exception to this is when bypass functionality is requested, as Port B is needed to provide the bypass data in this case. The default setting is for the Port B value to be provided via Port B.

Table 1: Core Signal Pinout

Signal	Signal Direction	Description
B[M:0]	Input	Input bus
S[P:0]	Output	Asynchronous Output
Q[P:0]	Output	Synchronous Output
ADD	Input	Controls operation performed by Adder/Subtractor-based accumulator
C_IN	Input	Carry Input
C_OUT	Output	Carry Output: Adder and Adder/Subtractor-based accumulators only
Q_C_OUT	Output	Registered Carry Output: Adder and Adder/Subtractor-based accumulators only
B_IN	Input	Borrow Input
B_OUT	Output	Borrow Output: Subtractor-based accumulators only
Q_B_OUT	Output	Registered Borrow Output: Subtractor-based accumulators only
OVFL	Output	Overflow Output: signed modules only
Q_OVFL	Output	Registered Overflow Output: signed modules only
CE	Input	Clock Enable
CLK	Input	Clock signal: rising edge
BYPASS	Input	Enables the value on port B to bypass the accumulator logic and appear directly on the output register.
ASET	Input	Asynchronous Set: forces the registered output to a High state when driven
ACLR	Input	Asynchronous Clear: forces outputs to a Low state when driven
SSET	Input	Synchronous Set: forces the registered output to a High state on next concurrent clock edge
SCLR	Input	Synchronous Clear: forces the registered output to a Low state on next concurrent clock edge
AINIT	Input	Asynchronous Initialize: forces registered outputs to user defined state when driven

Signal	Signal Direction	Description
SINIT	Input	Synchronous Initialize: forces registered outputs to user defined state on next concurrent clock edge

Note: All control inputs are Active High. Should an Active Low input be required for a particular control pin an inverter must be placed in the path to the pin. The inverter will be absorbed appropriately during mapping. .

- **Output Options:** Select the appropriate radio button for the types of outputs required. Output options defined here apply to all outputs. The default setting is **Registered**.
- **Output Width:** Enter the required output width. The valid range is 1 to 258. The default value is 16.
- **Register Options:** Clicking on this button brings up the Register Options parameterization screen (see figure 2).
- **Carry/Overflow Options:**
 - **Carry/Borrow Input:** The presence of a C_IN or B_IN pin is controlled by the setting of this check box. The pin generated for add and adder/subtractor-based accumulators is named C_IN. The pin generated for subtractor-based accumulators is named B_IN. The default is for a C_IN or B_IN pin to be generated.
 - **Carry/Borrow Output:** The presence of a C_OUT or B_OUT pin is controlled by the setting of this check box. This option is only enabled when the module generates an unsigned result (i.e., when **Port B Sign** is set to unsigned). The pin generated for adder-based and adder/subtractor-based accumulators is named C_OUT. The pin generated for subtractor-based accumulators is named B_OUT. The default value is for a C_OUT or B_OUT pin not to be generated.
 - **Overflow Output:** The presence of an OVFL pin is controlled by the setting of this check box. This option is only enabled when the module generates a signed result (see Table 2). The default behavior is to not generate an OVFL pin.
- **Bypass:** Activating the BYPASS pin allows the value on the Port B to pass through the logic and be loaded into the output register on the next active clock edge. This check box is only available on a registered module. The default is for no BYPASS pin to be generated.
- **CE Override for Bypass:** This parameter controls whether or not the BYPASS input is qualified by CE. When this box is checked the activation of the BYPASS signal will also enable the register. When this box is unchecked the register needs to have CE active in order to load the B port data. By default this check box is checked.
- **Bypass Sense:** BYPASS is the only pin that has a parameter to control its active sense. This is because

selection of an **Active Low** bypass results in a significant area saving for the module. By default this parameter is set to **Active High** so that it conforms with the active sense of all other control signals.

- **Saturate:** When saturation is selected the module output will be 'clipped' to a minimum and maximum value. For a signed module the minimum value is $-(2^{M-1} - 1)$ and the maximum value is $(2^{M-1} - 1)$. For an unsigned module the minimum value is 0 and the maximum value is $(2^M - 1)$.

- **Create RPM:** When this box is checked the module is generated with relative location attributes attached. The resulting placement of the module is in a column with two bits per slice. The default operation is to create an RPM.

Note that when a module is created as an RPM it is possible that one or more of the module dimensions may exceed those of the device being targeted. If this is the case mapping errors will occur and the compilation process will fail. In this case the module should be re-generated with the **Create RPM** checkbox unchecked.

The Register Options parameterization screen for this module is shown in Figure 2. The parameters are as follows:

- **Clock Enable:** When this box is checked the module is generated with a clock enable input. The default setting is unchecked.
- **CE Overrides:** This parameter controls whether or not the SSET, SCLR, and SINIT inputs are qualified by CE. This parameter is only enabled when a **Clock Enable** input has been requested.

When **CE Overrides Sync Controls** is selected an active level on any of the synchronous control inputs will only be acted upon when the CE pin is also Active. Note that this is not the way that the dedicated inputs on the flip-flop primitives work, and so setting the **CE Overrides** parameter to **CE Overrides Sync Controls** will force any synchronous control functionality to be implemented using logic in the Look Up Tables (LUTs) preceding the output register. This results in increased resource utilization.

When **Sync Controls Override CE** is selected an active level on any of the synchronous control inputs is acted upon irrespective of the state of the CE pin. This setting allows the dedicated inputs on the flip-flop primitives to be used for the synchronous control functions provided that asynchronous controls are not requested. If both asynchronous and synchronous controls are requested, the synchronous control functionality must be implemented using logic in the LUTs preceding the output register. In this case, the CE input has to be gated with the synchronous control inputs so that each synchronous control input and the CE input can generate a CE signal to the flip-flops. This results in a performance degrada-

tion for the module due to the additional gating in the CE path.

The default setting is **Sync Controls Override CE** so that the more efficient implementation can be generated.

- **Asynchronous Settings:** All asynchronous controls are implemented using the dedicated inputs on the flip-flop primitives. The module can be generated with the following asynchronous control inputs by clicking on the appropriate button:
 - **None:** No asynchronous control inputs. This is the default setting.
 - **Set:** An ASET control pin is generated.
 - **Clear:** An ACLR control pin is generated.
 - **Set and Clear:** Both ASET and ACLR control pins are generated. ACLR has priority over ASET when both are asserted at the same time.
 - **Init:** An AINIT control pin is generated which, when asserted, will asynchronously set the output register to the value defined in the **Asynchronous Init Value** text box.

- **Asynchronous Init Value:** This text box accepts a hex value whose equivalent bit width must be less than or equal to the **Output Width**. If a value is entered that has fewer bits than the **Output Width** it is padded with zeros. An invalid value is highlighted in red in the text box.

The default value is 0.

- **Synchronous Settings:** When no asynchronous controls are requested (i.e. the **Asynchronous Setting** is **None**) the synchronous controls can be implemented using the dedicated inputs on the flip-flop primitives. There are exceptions to this which are described in the sections for the **Set/Clear Priority** and **CE Overrides** parameters.

When asynchronous controls are present any synchronous control functionality must be implemented using logic in the Look Up Tables (LUTs) preceding the output register. With modules where a non-registered output is not required there are combinations of parameters that allow this logic to be absorbed into the same LUTs used to implement the function. In cases where this absorption is not possible the synchronous control logic will require an additional LUT per output bit.

The module can be generated with the following synchronous control inputs by clicking on the appropriate button:

- **None:** No synchronous control inputs. This is the default setting.
- **Set:** An SSET control pin is generated.
- **Clear:** An SCLR control pin is generated.
- **Set and Clear:** Both SSET and SCLR control pins are generated. SCLR/SSET priority is defined by the setting of the **Set/Clear Priority** parameter.
- **Init:** An SINIT control pin is generated which, when asserted, will synchronously set the output register

to the value defined in the **Synchronous Init Value** text box.

- **Set/Clear Priority:** By selecting the appropriate radio button the relative priority of SCLR and SSET can be controlled. This parameter is only enabled when **Set and Clear** is selected for **Synchronous Settings**.

A setting of **Clear Overrides Set** corresponds to the native operation of the flip-flop primitive. This setting will result in a more efficient implementation when asynchronous controls are not requested. A setting of **Set Overrides Clear** can only be implemented using logic in the LUTs preceding the output register.

The default setting is **Clear Overrides Set** so that the dedicated inputs on the flip-flops can be used if available.

- **Synchronous Init Value:** This text box accepts a hex value whose equivalent bit width must be less than or equal to the **Output Width**. If a value is entered that has fewer bits than the **Output Width** it is padded with zeros. An invalid value is highlighted in red in the text box. This parameter is only enabled when the **Synchronous Settings** parameter is set to **Init**. The default value is 0.

Power On Conditions

See the **FD-based Register** datasheet for information on the power up values for the accumulator.

Parameter Values in the XCO File

XCO file parameter names and their values are identical to the names and values shown in the GUI, except that underscore characters (_) are used instead of spaces. The text in an XCO file is case insensitive.

Table 2 shows the XCO file parameters and values, and summarizes the GUI defaults. The following is an example of the CSET parameters in an XCO file:

```
CSET component_name = abc123
CSET operation = add
```

```
CSET feedback_scaling = 0
CSET port_b_width = 16
CSET port_b_sign = unsigned
CSET port_b_constant = FALSE
CSET port_b_constant_value = 0000
CSET output_options = registered
CSET output_width = 16
CSET carry_borrow_input = TRUE
CSET carry_borrow_output = FALSE
CSET overflow_output = FALSE
CSET bypass = FALSE
CSET ce_override_for_bypass = FALSE
CSET bypass_sense = active_high
CSET create_rpm = TRUE
CSET clock_enable = FALSE
CSET ce_overrides = sync_controls_override_ce
CSET asynchronous_settings = none
CSET async_init_value = 0000
CSET synchronous_settings = none
CSET sync_init_value = 0000
CSET saturate = FALSE
CSET set_clear_priority = clear_overrides_set
```

Core Resource Utilization

For an accurate measure of the usage of primitives, slices, and CLBs for a particular point solution, check the **Display Core Viewer after Generation** checkbox, in CoreGen.

Ordering Information

This core is downloadable free of charge from the Xilinx IP Center (www.xilinx.com/ipcenter), for use with 3.1i and later versions of the Xilinx CORE Generator System. The CORE Generator System is bundled with the Alliance and Foundation implementation tools.

To order Xilinx software contact your local Xilinx sales representative. For information on the Xilinx sales representative nearest you, please refer to: <http://www.xilinx.com/company/sales.htm>.

Table 2: XCO File Values and Default Values

Parameter	XCO File Values	Default GUI Setting
component_name	ASCII text starting with a letter and based upon the following character set: a..z, 0..9 and _	blank
operation	One of the following keywords: add, subtract, add_subtract	add
feedback_scaling	Integer in the range 0 to 8	0
port_b_width	Integer in the range 1 to 256	16
port_b_sign	One of the following keywords: unsigned, signed	unsigned
port_b_constant	One of the following keywords: true, false	false
port_b_constant_value	Hex value whose value does not exceed $2^{\text{port_b_width_1}}$	0
output_options	One of the following keywords: registered, both	registered
output_width	Integer in the range 1 to 258	16
carry_borrow_input	One of the following keywords: true, false	true
carry_borrow_output	One of the following keywords: true, false	false
overflow_output	One of the following keywords: true, false	false
bypass	One of the following keywords: true, false	false
ce_override_for_bypass	One of the following keywords: true, false	true
bypass_sense	One of the following keywords: active_high, active_low	active_high
create_rpm	One of the following keywords: true, false	true
clock_enable	One of the following keywords: true, false	false
ce_overrides	One of the following keywords: sync_controls_override_ce, ce_overrides_sync_controls	sync_controls_override_ce
asynchronous_settings	One of the following keywords: none, set, clear, set_and_clear, init	none
async_init_value	Hex value whose value does not exceed $2^{\text{output_width_1}}$	0
synchronous_settings	One of the following keywords: none, set, clear, set_and_clear, init	none
sync_init_value	Hex value whose value does not exceed $2^{\text{output_width_1}}$	0
set_clear_priority	One of the following keywords: clear_overrides_set, set_overrides_clear	clear_overrides_set
saturate	One of the following keywords: true, false	false