


SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A	\approx	\approx	1.60
A ₁	0.05	0.10	0.15
A ₂	1.35	1.40	1.45
D/E	26.00 BSC		
D ₁ /E ₁	24.00 BSC		
b	0.17	0.22	0.27
c	0.09	\approx	0.20
e	0.50 BSC		
L	0.45	0.60	0.75
ccc	\approx	\approx	0.08
ddd	\approx	\approx	0.08

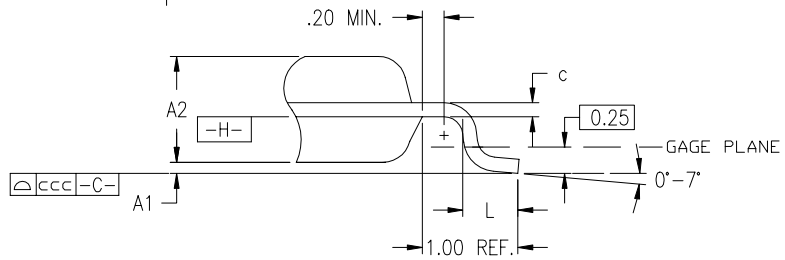

BOTTOM VIEW

NOTES:

- ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
 - DIMENSIONS "D1" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED 0.25mm ON EACH SIDE.
 - THE TOP OF PACKAGE MAYBE SMALLER THAN THE BOTTOM OF PACKAGE BY 0.10mm.
 - THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MS-026.
- MARK ORIENTATION WITH RESPECT TO PIN-1 I.D.
 IF 2 OR MORE CIRCLES EXIST ON TOP OF THE PACKAGE, USE THE SMALLEST CIRCLE AS PIN-1 I.D.

160-PIN TQFP (TQ160)