


ZONE	REV	REVISION DESCRIPTION	DATE	DRAWN	CHECK	APPVD
	01	INITIAL RELEASE PER DCN #6629	3/27/95	EWR	JS	FE
	02	CHANGED PER DCN #7044	6/27/95			
	03	CHANGED PER DCN #0100160	11/04/96			
		SEE MATRIX FOR FURTHER REVISION HISTORY				

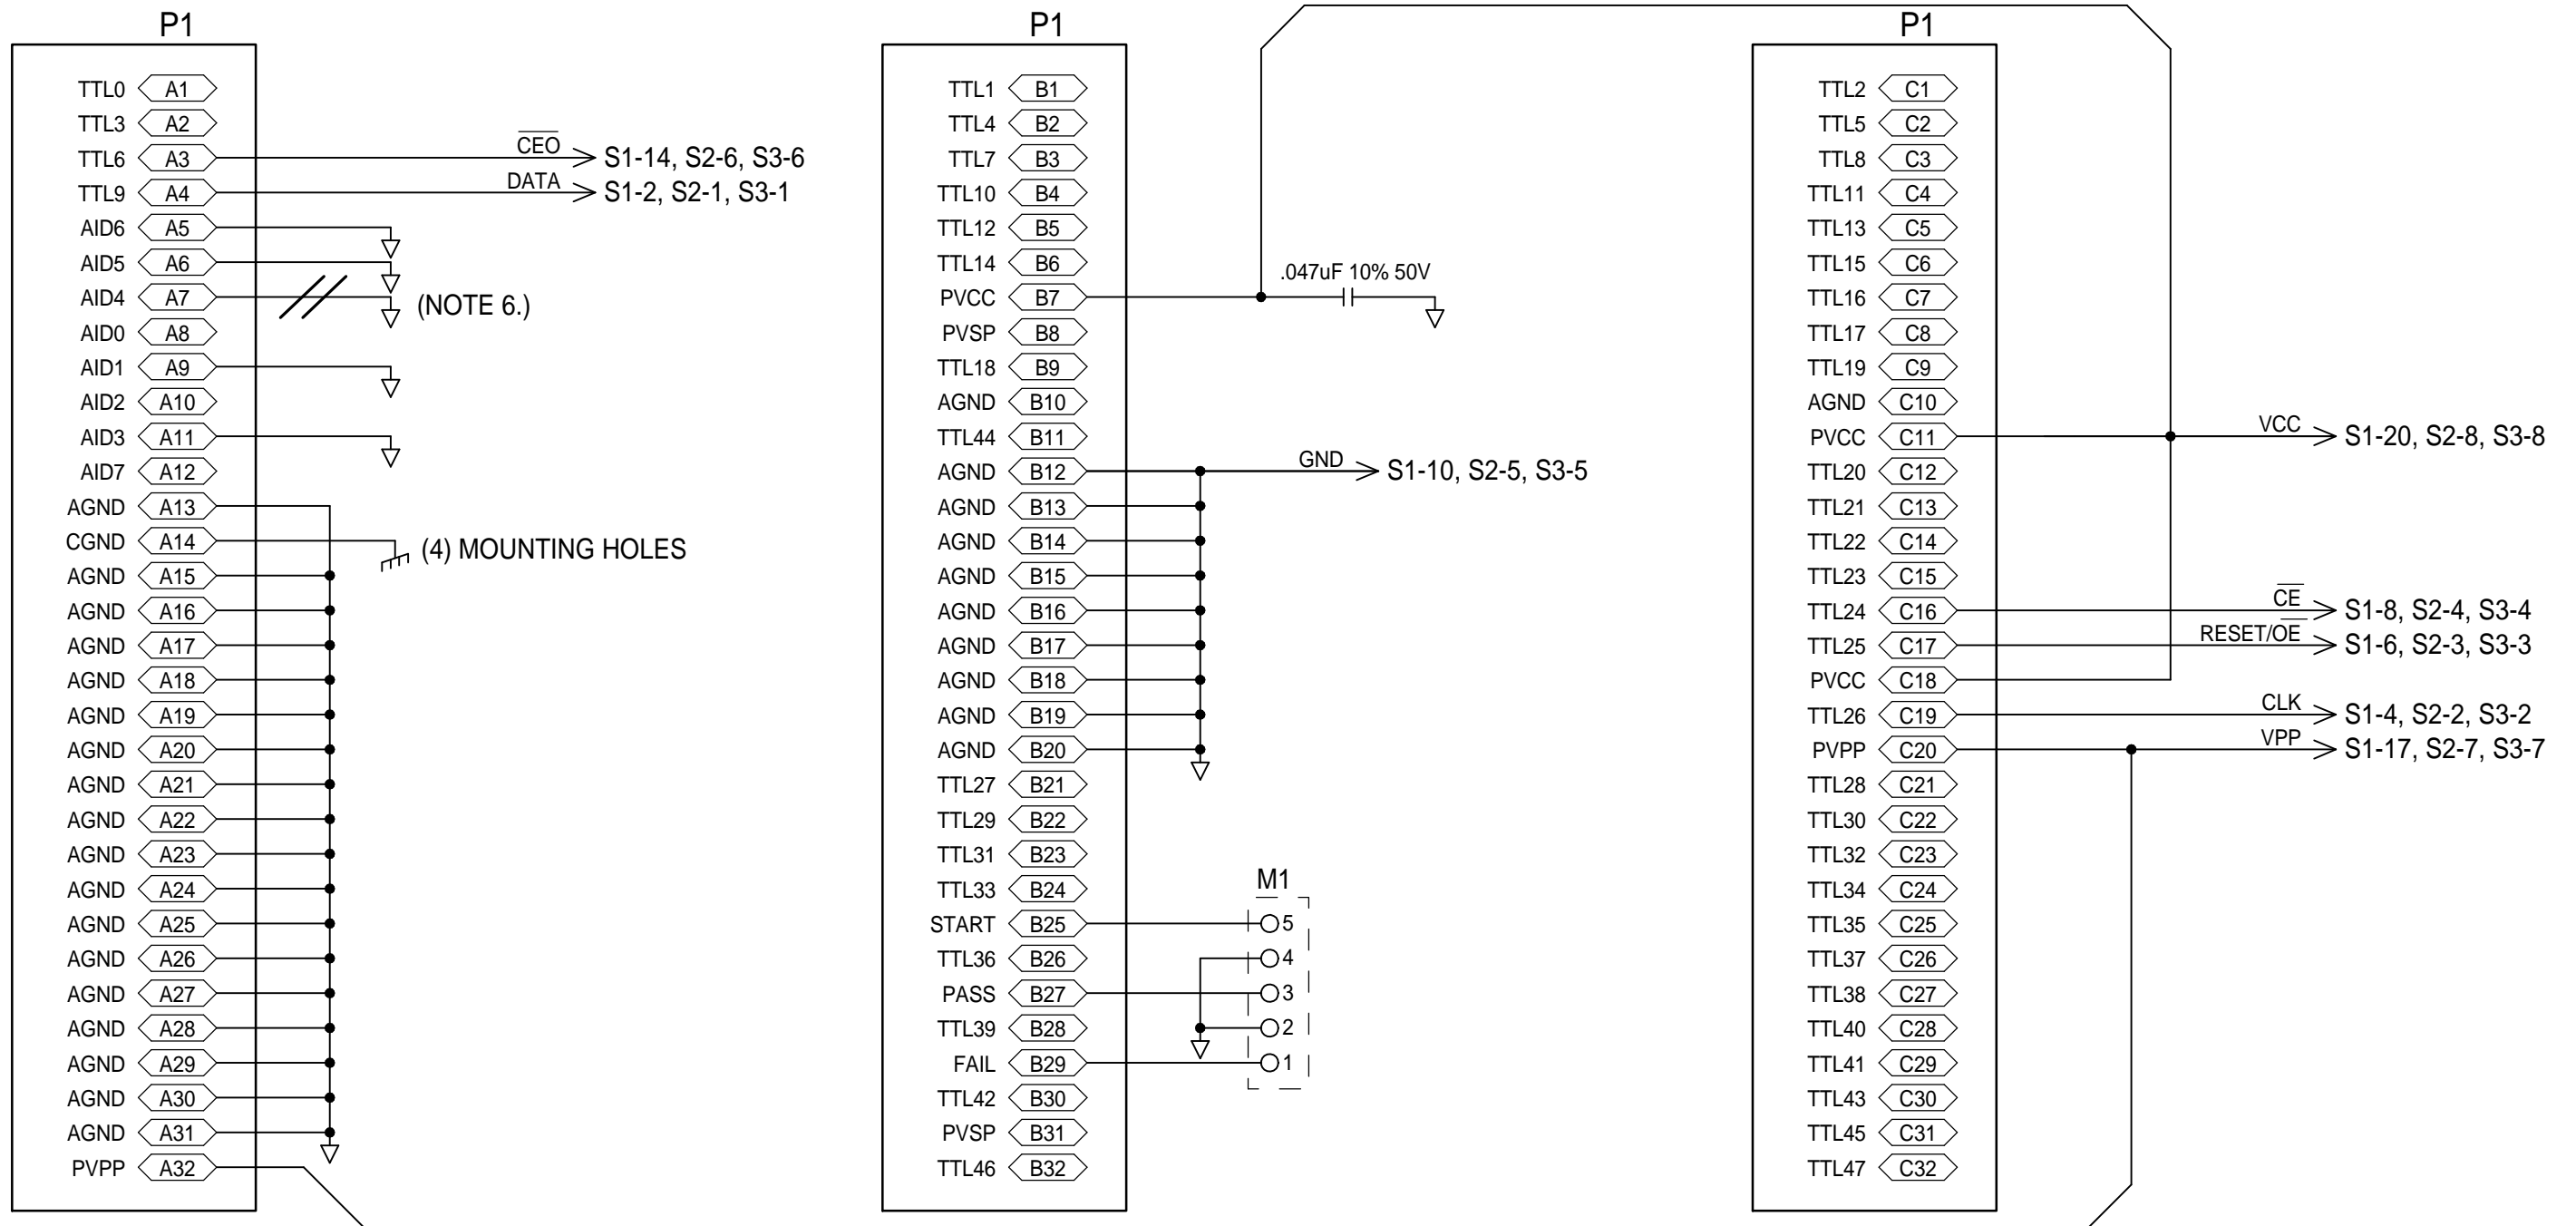

- NOTES:
1. P1 is a 96-pin male connector, 3 rows (A,B,C) of 32 pins.
 2. S1 is a 20 pin PLCC "live bug" Socket.
 3. S2 is a 14-pin DIP Socket, only the lower 8 pins are used.
 4. S3 is an S08 8-pin Socket.
 5. M1 are connection pads for an autohandler.
 6. Board ID is 85 hex, 1000 0101 bin, 133 dec for DIP8 or cut trace at pin A7 to make ID 95 hex, 1001 0101 bin, 149 dec for PC20/SO8.

TOLERANCES

\triangle	.X	.XX	.XXX
-------------	----	-----	------

Unless otherwise specified, dimensions are in inches.

XILINX[®]

DRAWN BY	EWR/esler	DATE	3/23/95
CHECKED BY	JS	DATE	3/21/95
ENG APPROVAL		DATE	
MFG APPROVAL	FE	DATE	3/28/95
FSCM 68994			

TITLE
SCHEMATIC, 0430843 & 0430868
HW-137-DIP8 & PC20/SO8 ADAPTER

PROJECT: HW130

SIZE	DRAWING NUMBER	REV.
B	0380417	04

SCALE NONE SHEET 1 OF 1