
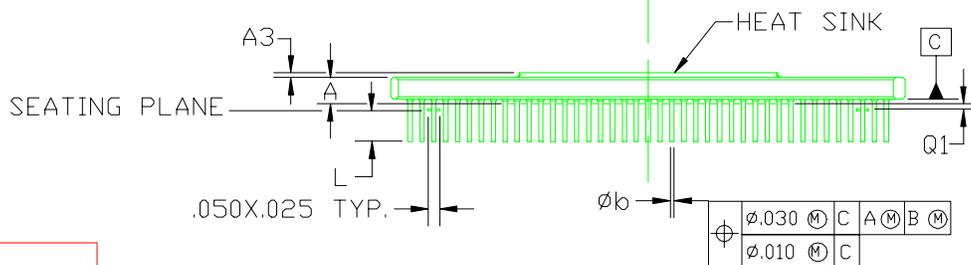


BOTTOM VIEW

TOP VIEW

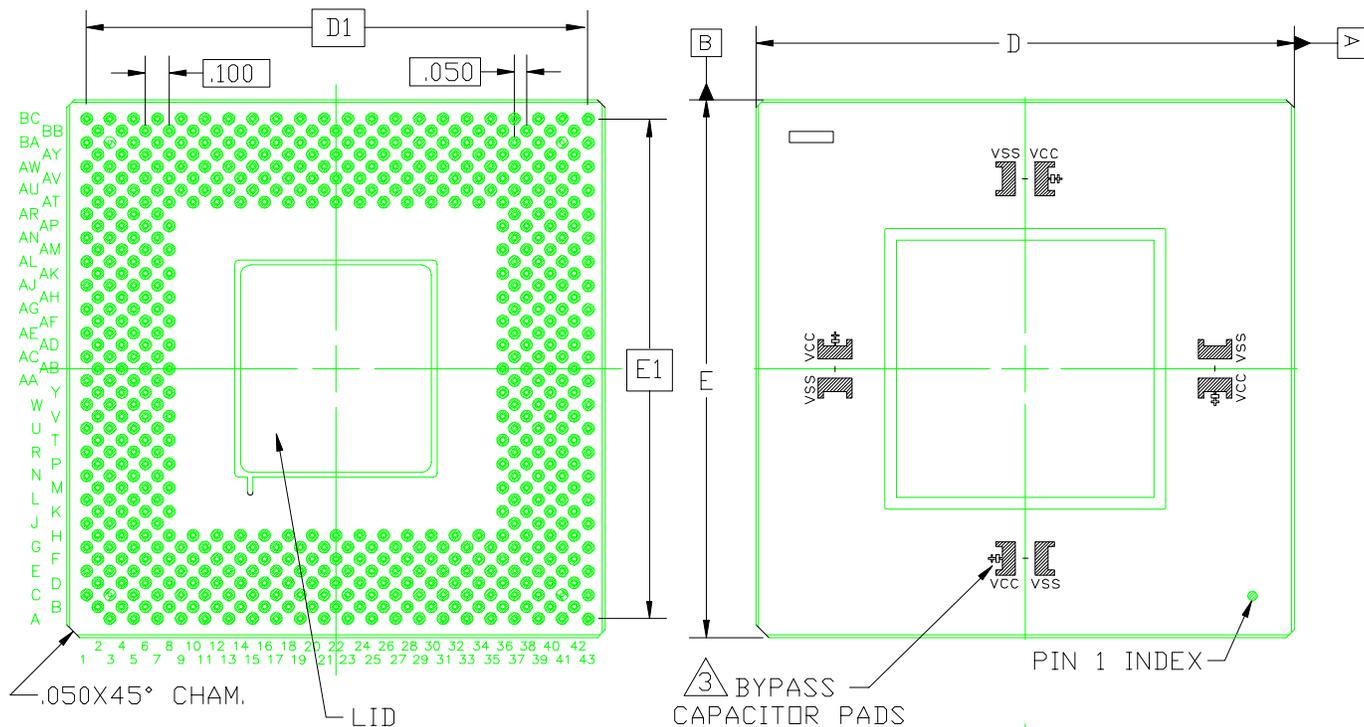

PG559			
SYMBOL	INCHES		
	MIN.	NOM.	MAX.
A	$\cancel{\text{---}}$	$\cancel{\text{---}}$	.165
A3	.015	.020	.025
D/E	2.240	2.260	2.280
D <sub>1</sub> /E <sub>1</sub>	2.100 BSC		
L	.110	$\cancel{\text{---}}$	.150
Q <sub>1</sub>	.015	$\cancel{\text{---}}$	.045
M	43		
phi b	.016	.018	.020
REF.	$\cancel{\text{---}}$		

## NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994.
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. BYPASS CAPACITOR PADS – GOLD PLATED MAY OR MAY NOT BE PRESENT ON ALL PACKAGES.
4. LEAD FINISH: GOLD PLATED
  - COMMERCIAL (35 MICROINCHES MIN.)
  - MILITARY (50 MICROINCHES MIN.)

## 559-PIN CERAMIC PGA (PG559)