


Ceramic Braized CQFP (CB228) Package

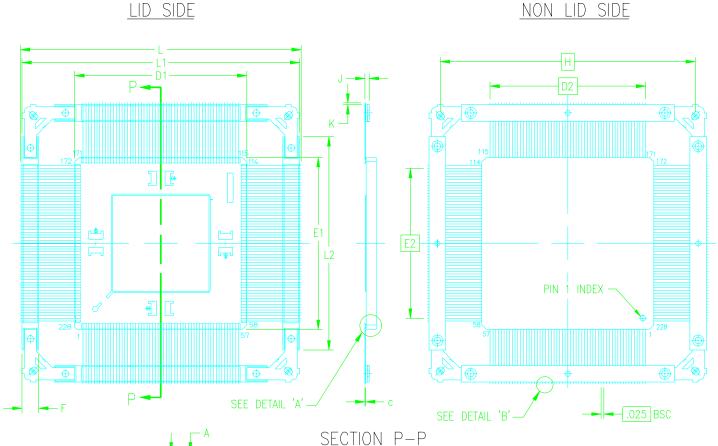

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982

DETAIL 'B'

- 2. SYMBOL 'N' IS THE NUMBER OF TERMINALS.
- 3. PACKAGES ARE SHIPPED UNFORMED.

DETAIL 'A'

4. LEAD FINISH: GOLD (50 MICROINCHES MINIMUM)
OVER NICKEL PER MIL-I-38535

S Y M B	INCHES		
L	MIN.	N□M.	MAX.
Α	4	4	.130
A1	4	4	.110
A2	4	4	.020
В	.006	.008	.012
С	.005	.006	.009
D1/E1	1.534	1.550	1.570
D2/E2	1.400 BSC		
F	.125	.150	.175
Н	2,300 BSC		
J	.030	.035	.040
К	*	4	.020
L	4	4	2.580
L1	2.480	2.500	2.530
L2	1,900	1.920	1,940
N	228		

228-PIN CERAMIC BRAZED CQFP (CB228)

© 2000 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.