
Ceramic PGA (PG120, PG132, PG156) Packages

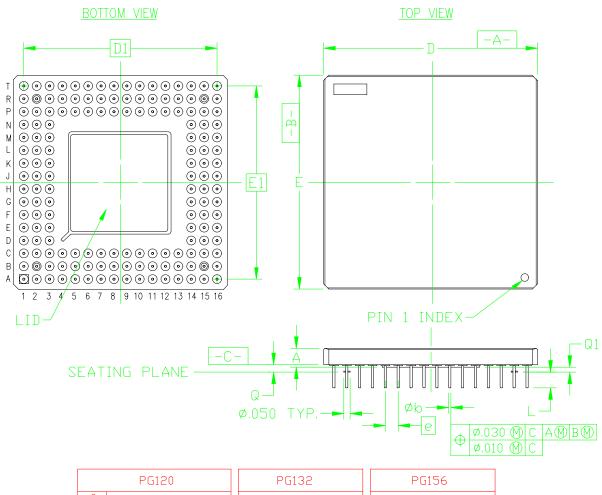

PG120				
S Y M B	INCHES			
B	MIN.	N□M.	MAX.	
Α	4	4	.145	
D/E	1.340	1.360	1.380	
D ₁ /E ₁	1.200 BSC			
L	.120	.130	.140	
Q	.045	1/4	.060	
Q ₁	.025	*	4	
е	.100 BSC			
Øb	.016	.018	.020	
М	13			
REF.	JEDEC M□-067-AE			

	PG132					
	INCHES					
M.	IN.	N□M.	MAX.			
~	×	4	.145			
1.4	40	1.460	1.480			
	1.300 BSC					
.12	0	.130	.140			
.04	45	4	.060			
.02	25	*	4			
	.100 BSC					
.01	6	.018	.020			
	14					
JE	JEDEC MO-067-AF					

PG156					
INCHES					
MIN.	N□M.	MAX.			
4	*	.145			
1.640	1.660	1.680			
1.500 BSC					
.120	.130	.140			
.045	1/4	.060			
.025	*	4			
.100 BSC					
.016	.018	.020			
16					
JEDEC M□-067-AH					

NOTES:

- ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982
- 2. SYMBOL 'M' IS THE PIN MATRIX SIZE.
- 3. LEAD FINISH: GOLD PLATED
 - COMMERCIAL (35 MICROINCHES MIN.)
 - MILITARY (50 MICROINCHES MIN.)
- 4. ALL THESE PACKAGES HAS 3 ROWS OF PINS ON EACH SIDE.

120, 132, 156-PIN CERAMIC PGA (PG120, PG132, PG156)

© 2000 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm.
All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.