



## How Spartan Series FPGAs Compete for Gate Array Production

XAPP120 December 2, 1998 (Version 1.1)

Application Note by Ashok Chotai

### Summary

This application note discusses the enormous progress made by FPGAs in the areas of technology, low-price and performance. It discusses the major advantages of using FPGAs over traditional gate arrays, which makes FPGAs the best high-volume production solution available today.

### Xilinx Families

Spartan and SpartanXL

## Introduction

The ASIC industry's claim that gate arrays are always more cost-effective than FPGAs in production has been reversed. The current generation "ASIC Replacement" FPGAs offer competitive production pricing in addition to providing the benefits of fast development-to-production and in-system reprogrammability. Gate array users must now analyze the latest FPGAs to determine the best ASIC technology for their upcoming design and production needs.

## FPGAs Contend for Mass Production


The Xilinx Spartan Series (see [Table 1](#)) was created to displace low-end (up to 40K system gates) ASICs in volume production by providing the advantages of FPGAs at competitive prices. Using an advanced logic-process technology, the Spartan Series substantially reduced die size over the previous generation FPGAs while measurably improving gate-area density and performance. Although FPGAs have historically lagged the ASIC industry by one or two process generations, the current Spartan series FPGAs surpass most of today's gate arrays by using a multi-feature size 0.35/0.25  $\mu\text{m}$  (submicron) technology. In the past a larger die size prevented FPGAs from being cost competitive.

Future Xilinx FPGAs will use an even more advanced 0.18  $\mu\text{m}$  process and attain 1 million system gates. Because FPGAs contain more transistors (75 million) than the Pentium II microprocessor (about 8 million), independent wafer foundries have chosen these complex devices to debug new fab processes, replacing formerly used DRAMs. This should ensure that Xilinx FPGAs remain on the leading edge of process technology for years to come. (See [Figure 1](#)).

## SpartanXL Closes the Price Gap of FPGAs & ASICs


The 3.3-Volt SpartanXL family is the lowest cost FPGA series in the industry. It incorporates ASIC-like features such as dual-port synchronous RAM and supports system frequencies over 80 MHz. With competitive volume pricing, the SpartanXL family attains a pad-limited die size and cost equivalence to gate arrays of up to 205 I/O pins. The term "pad-limited" refers to a die that is shrunk to the limits imposed by the bonding pads. Although gate arrays still maintain a denser architecture than FPGAs, the Spartan series is able to effectively compete for production based upon I/O count. For example, the 160 I/O SpartanXL XCS20XL, shown in [Figure 2](#), has the same die size and cost as a 160-pin I/O 0.5  $\mu\text{m}$  gate array.

Because of very low power consumption, SpartanXL devices can achieve a low manufacturing cost by using the less expensive high-volume plastic packages. In addition, the test methodology has been streamlined with more efficient test hardware, built-in self-test features and shorter test times. The manufacturing and die savings eliminate former cost barriers and provide the means for SpartanXL devices to move beyond prototyping and provide a compelling alternative for mass production.

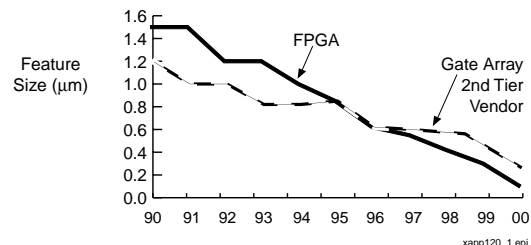

**Figure 1: Spartan Series Surpasses Gate Arrays in Process Feature Size**


# How Spartan Series FPGAs Compete for Gate Array Production

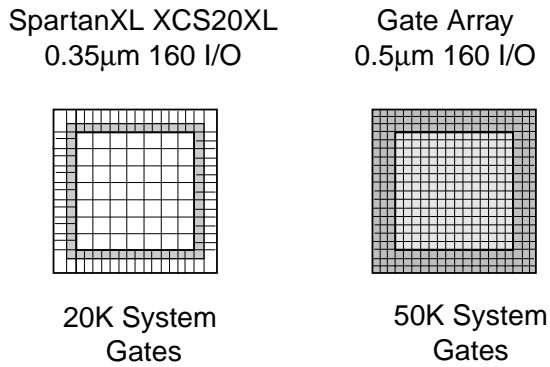

**Figure 2: SpartanXL Device Matches Die Size With Gate Array for Pad-Limited Devices**

## Advanced Process Penalizes Gate Arrays

Mask gate arrays incur a large penalty when migrating to deep submicron processes. Because transistors have shrunk much faster than metal lines, smaller transistors drive larger and longer metal lines. The result is that interconnect delay now dominates gate delay. (See [Figure 3](#)) Minimizing interconnect delay requires adding metal mask layers to create more routing resources. As an example, each additional mask layer for the 0.35 µm process, unfortunately, costs the ASIC supplier up to \$15K, and it also

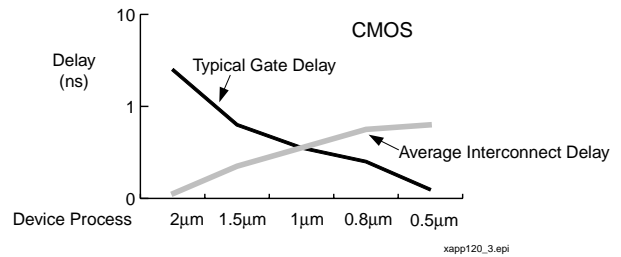


**Figure 3: Relative Importance of Interconnect vs. Gate Delay**

extends the prototype fab time. Since most ASICs today are fabricated with 4-5 metal layers, a \$60-75K cost for masks easily results in over \$100K non-recurring engineering (NRE) charges to the customer! In contrast, the 0.35 µm FPGA does not incur the same penalties of higher cost or longer turnaround time because each mask is created only once to serve hundreds of different customers over the life-time of the device. A deep submicron gate array loses much of its value when NREs are more than \$100K and prototype time is extended by a few weeks.

As process technology increases wafer and mask costs, the gate array industry is undergoing a fundamental transition. Some major suppliers, like Motorola and LSI Logic, have left the gate array business to re-focus on high-end standard cell products that support system-on-chip designs. Dataquest forecasts gate array revenues will decline substantially over the next several years, while PLDs and standard cells are projected to be the primary growth technologies.

**Table 1: Xilinx Spartan Series FPGAs**

5-Volt Devices	XCS05	XCS10	XCS20	XCS30	XCS40
3.3-Volt Devices	XCS05XL	XCS10XL	XCS20XL	XCS30XL	XCS40XL
System Gates	2K-5K	3K-10K	7K-20K	10K-30K	13K-40K
Logic Cells	238	466	950	1368	1862
Max Logic Gates	3,000	5,000	10,000	13,000	20,000
Flip-Flops	360	616	1120	1536	2016
Max RAM bits	3,200	6,272	12,800	18,432	25,088
Max User I/O	77	112	160	192	205
System Performance	80MHz	80MHz	80MHz	80MHz	80MHz

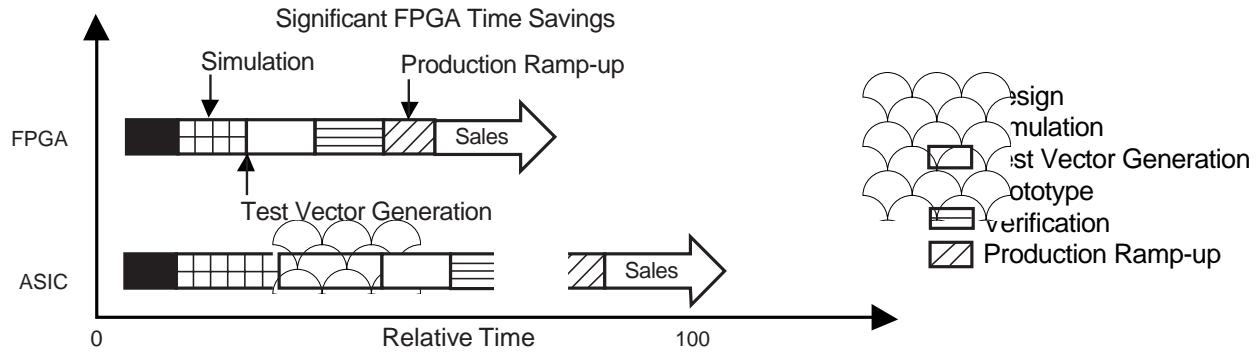

xapp120\_4

**Figure 4: FPGAs Versus ASICs Design Time Savings**

## Spartan Series Advantages Over Gate Arrays

Because today's product life cycles are so brief (12-18 months), it is vital to attain the best development-to-production cycle time. Programmable logic provides both rapid prototyping and a quick ramp to full production.

With in-system reprogrammability, FPGAs demonstrate the fastest development time of any ASIC technology. Early availability of prototype hardware means less time spent in extensive simulation. Rapid prototyping also facilitates concurrent engineering and real-time debugging of applications such as video, graphics, and sound cards. Prototyping with FPGAs enables bugs to be eliminated before they reach costly silicon. And since Xilinx FPGAs are 100% factory tested, the usual scan insertion, test vector generation and Automatic Test Pattern Generation (ATPG) services are optional for lower density FPGAs. (Xilinx recommends test vectors, however, for the higher density FPGAs.)

### Production Parts Available When Development is Complete

Fast ramp-to-production is another primary advantage of programmable logic. (See Figure 4) After development and beta testing, early initial production can be critical to product acceptance. Sales channels can be quickly stocked to satisfy initial customer demand and start the new product revenue flow. With the standard ASIC 8-16 week production schedule, a 2-4 months sales delay may substantially decrease revenues and profits throughout the life of the product. Because the lead-time for FPGA production quantities is typically only 0-4 weeks, market penetration is immediate. The well-known McKinsey study found that a 6 month delay costs one third of the profits over the life time of the product.

## Supply-Chain Management

In full production, programmable logic provides the additional advantage of Just-In-Time (JIT) deliveries from distribution stock or manufacturer's inventory. Because masked ASICs are "custom" products, supply-chain management is more complex and expensive. ASIC distribution stocking arrangements can also be expensive and ASIC factory deliveries can sometimes be affected by fab yields, assembly mishaps, and tester down time.

FPGAs eliminate the risk of missed deliveries and safeguard inventory and work-in-process if design changes occur or demand is weak. Many ASIC users find that an FPGA with a slightly higher unit cost may provide more value and lower overall system costs than the masked ASICs. A lower unit cost does not necessarily reduce total system costs.

## Costly FPGA to ASIC Conversions

It is more difficult today to cost justify FPGA to ASIC conversions because of low cost FPGAs and quickly changing markets. Conversion to an ASIC means losing FPGA advantages and incurring design risks. Added costs such as NREs, conversion fees, silicon iterations, test vector creation for adequate fault coverage, board re-layout, new device characterization, loss of capability for quick changes, and the delay of engineering on a new project likely negates a slight unit cost difference.

FPGA to ASIC conversion time to production typically exceeds 4 months. The conversion time frame is often: conversion - 3 weeks, prototype - 3 weeks, full production - 10 weeks. Therefore a total of 16 weeks is needed before production is ramped and the transition from programmable to masked ASIC may begin. With either a short product life or a required mid-life product enhancement, many conversions cannot be cost justified.

In addition, FPGA users have no minimum order quantity. Cash and credit availability is preserved when there are no large gate array order commitments and the IC stock levels

## How Spartan Series FPGAs Compete for Gate Array Production

are minimal. Small and emerging companies will appreciate conserving their credit availability and valuable working capital for product development, test and marketing.

There are compelling advantages to use programmable logic in both development and in production. Today's FPGAs support standard Verilog and VHDL design flows that help in the transition of ASIC designs to programmable logic. Advanced process technology has leveled the playing field, and allowed FPGAs to be very competitive with low-density gate arrays. When ASIC users now consider

competitive pricing, time-to-production, and reprogrammability, the preferred ASIC technology becomes the FPGA!

Refer to the Xilinx web site (<http://www.xilinx.com>) for latest product information.

### Additional Information

- Spartan Series datasheet on the Xilinx web site (<http://www.xilinx.com/partinfo/ds060.pdf>)
- Xilinx Application Note: XAPP119 Adapting ASIC Designs for Use With Spartan FPGAs (<http://www.xilinx.com/xapp/xapp119.pdf>)



The Programmable Logic Company<sup>SM</sup>

#### Headquarters

Xilinx, Inc.  
2100 Logic Drive  
San Jose, CA 95124  
U.S.A.  
Tel: 1 (800) 255-7778  
or 1 (408) 559-7778  
Fax: 1 (408) 559-7114  
Email: [hotline@xilinx.com](mailto:hotline@xilinx.com)  
Web: <http://www.xilinx.com>

Nashua, New Hampshire  
Tel: (603) 891-1098

Raleigh, North Carolina  
Tel: (919) 846-3922

West Chester, Pennsylvania  
Tel: (610) 430-3300

Dallas, Texas  
Tel: (972) 960-1043

Xilinx, Ltd.  
Byfleet, United Kingdom  
Tel: (44) 1-932-3494013  
Email: [ukhelp@xilinx.com](mailto:ukhelp@xilinx.com)

XILINX Italia  
Via Alberto Mario 26  
20149 Milano  
Italia  
Tel: (39) 02-49-877-16  
FAX: (39) 02-49-877-27  
Email: [roberto.rosaia@xilinx.com](mailto:roberto.rosaia@xilinx.com)

Tel: 852-2-424-5200  
FAX: 852-2-494-7159  
Email: [hongkong@xilinx.com](mailto:hongkong@xilinx.com)

XILINX Korea  
Rm. 901, Sambo-Hojung Bldg.  
14-24, Yoido-Dong,  
Youngdeungpo-Ku  
Seoul, 150-715, Korea  
Tel : 822-761-4277  
FAX : 822-761-4278  
Email: [korea@xilinx.com](mailto:korea@xilinx.com)

#### North America

Irvine, California  
Tel: (949) 727-0780

Englewood, Colorado  
Tel: (303) 220-7541

Sunnyvale, California  
Tel: (408) 245-9850

Schaumburg, Illinois  
Tel: (847) 605-1972

#### Europe

Xilinx Sarl  
Jouy en Josas, France  
Tel: (33) 1-34-63-01-01  
Email: [frhelp@xilinx.com](mailto:frhelp@xilinx.com)

Xilinx GmbH  
München, Germany  
Tel: (49) 89-93088-0  
Email: [dlhelp@xilinx.com](mailto:dlhelp@xilinx.com)

#### Japan

Xilinx, K.K.  
Tokyo, Japan  
Tel: (81) 3-5321-7711  
Email: [jhotline@xilinx.com](mailto:jhotline@xilinx.com)

#### Asia Pacific

XILINX Asia Pacific  
Unit 4312, Tower II  
Metroplaza  
Hing Fong Road  
Kwai Fong, N.T.  
Hong Kong

Xilinx Taiwan  
Rm. 1006, 10F, No.2. Lane 150  
Sec. 5, Hsin Yin Rd.  
Taipei, Taiwan, R.O.C.  
Tel: 886-2-2758-8373  
Tel: 886-2-2758-8353  
Fax: 886-2-2758-8367

© 1998 Xilinx, Inc. All rights reserved. The Xilinx name and the Xilinx logo are registered trademarks, all XC-designated products are trademarks, and the Programmable Logic Company is a service mark of Xilinx, Inc. All other trademarks and registered trademarks are the property of their respective owners.

Xilinx, Inc. does not assume any liability arising out of the application or use of any product described herein; nor does it convey any license under its patent, copyright or maskwork rights or any rights of others. Xilinx, Inc. reserves the right to make changes, at any time, in order to improve reliability, function or design and to supply the best product possible. Xilinx, Inc. cannot assume responsibility for the use of any circuitry described other than circuitry entirely embodied in its products. Products are manufactured under one or more of the following U.S. Patents: (4,847,612; 5,012,135; 4,967,107; 5,023,606; 4,940,909; 5,028,821; 4,870,302; 4,706,216; 4,758,985; 4,642,487; 4,695,740; 4,713,557; 4,750,155; 4,821,233; 4,746,822; 4,820,937; 4,783,607; 4,855,669; 5,047,710; 5,068,603; 4,855,619; 4,835,418; and 4,902,910. Xilinx, Inc. cannot assume responsibility for any circuits shown nor represent that they are free from patent infringement or of any other third party right. Xilinx, Inc. assumes no obligation to correct any errors contained herein or to advise any user of this text of any correction if such be made.