
Ceramic PGA (PG120, PG132, PG156) Package

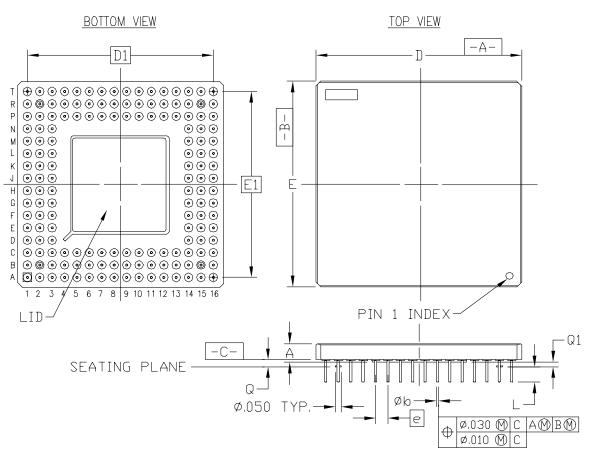

PG120				PG132			PG156			
S Y M	INCHES				INCHES			INCHES		
M B L	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.	
A	-the	${\prec}$.145	- The	×4	.145	74	-the	.145	
D/E	1.340	1.360	1.380	1.440	1.460	1.480	1.640	1.660	1.680	
D1/E1	1.200 BSC			1.300 BSC			1.500 BSC			
L	.120	.130	.140	.120	.130	.140	.120	.130	.140	
Q	.045	¥	.060	.045		,060	,045	-	,060	
Q1	.025	*	~~~	.025	~~~	~~~	.025	~~~	~~~	
e	.100 BSC			.100 BSC			.100 BSC			
Øb	.016	.018	.020	.016	.018	.020	.016	.018	.020	
М		13			14			16		
REF.	JEDEC MO-067-AE			JEDEC	JEDEC MO-067-AF			JEDEC MD-067-AH		

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM

TO ANSI Y14.5M-1982

2. SYMBOL 'M' IS THE PIN MATRIX SIZE.

3. LEAD FINISH: GOLD PLATED

- COMMERCIAL (35 MICROINCHES MIN.)

- MILITARY (50 MICROINCHES MIN.)

4. ALL THESE PACKAGES HAS 3 ROWS OF PINS ON EACH SIDE.

120, 132, 156-PIN CERAMIC PGA (PG120, PG132, PG156)

© 2001 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.