BC BABB

AWAY

AUAV AU AR AN AN AN AL AJ AGAH AE AD

AC

AA


W U R Ν L .1

G Ε D С Α

Ceramic PGA (PG559) Package

TOP VIEW

BOTTOM VIEW

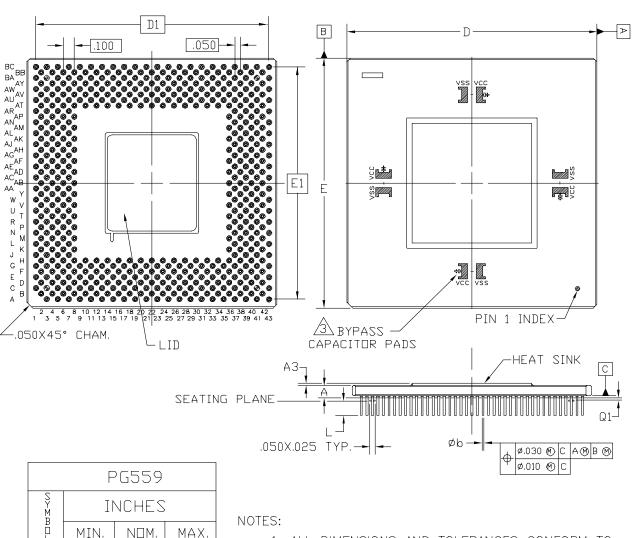

- 1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994.
- 2. SYMBOL "M" IS THE PIN MATRIX SIZE.
- BYPASS CAPACITOR PADS GOLD PLATED MAY OR MAY NOT BE PRESENT ON ALL PACKAGES.
- 4. LEAD FINISH: GOLD PLATED
 - COMMERCIAL (35 MICROINCHES MIN.)
 - MILITARY (50 MICROINCHES MIN.)

559-PIN CERAMIC PGA (PG559)

© 2001 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

А

AЗ

D/E

 D_1/E_1

L

 Q_1

М

Øb

REF

.015

2,240

,110

.015

.016

.020

2.100 BSC

A

43

.018

2,260 2,280

.165

.025

.150

.045

.020